

Elsevier Editorial System(tm) for Fisheries Research

Manuscript Draft

Manuscript Number: FISH896R2

Title: Geostatistical Assessment of Sampling Designs for Portuguese Bottom Trawl Surveys

Article Type: Research Paper

Keywords: bottom trawl surveys; geostatistics; simulation; hake; horse mackerel; sampling design

Corresponding Author: Dr. Ernesto Jardim, MSc

Corresponding Author's Institution: IPIMAR - Instituto Nacional de Investigação Agrária e das Pescas

First Author: Ernesto Jardim, MSc

Order of Authors: Ernesto Jardim, MSc; Paulo Ribeiro, Jr, PhD

Manuscript Region of Origin: PORTUGAL

# Geostatistical Assessment of Sampling Designs for Portuguese Bottom Trawl Surveys

Ernesto Jardim<sup>1</sup> <ernesto@ipimar.pt> and Paulo J. Ribeiro Jr<sup>2</sup> <paulojus@ufpr.br>

14th February 2007

<sup>1</sup>Instituto Nacional de Investigação Agrária e das Pescas, Av. Brasília, 1449-006, Lisboa, Portugal  
Tel: +351 213 027 093

<sup>2</sup>Departamento de Estatística, Universidade Federal do Paraná, C.P. 19.081 CEP: 81.531-990, Curitiba,  
Paraná, Brasil

## Abstract

1  
2 New sampling designs for the Autumn Portuguese bottom trawl survey (ptBTS) were investigated  
3 to explore alternative spatial configurations and possible increments on sample size. The currently  
4 used stratified random design and five proposals of systematic based designs were assessed by a  
5 simulation study, adopting a geostatistical approach based on likelihood methods of inference. The  
6 construction of the designs was based on “*informal*” method to reflect the practical constraints of  
7 bottom trawl surveys. The proposed designs were a regular design with 28 locations (S28), two  
8 regular designs with extra regular added locations with 44 (S44) and 47 (S47) locations, a design  
9 which overlaps the regular and stratified random design currently used with 45 locations (S45) and  
10 an high density regular design with 108 locations (S108), used just as a benchmark. The designs were  
11 assessed by computing bias, relative bias, mean square error and coverages of confidence intervals.  
12 Additionally a variance ratio statistic between each study designs and a corresponding random design  
13 with the same sample size was computed to separate out the effects of different sample sizes and  
14 spatial configurations. The best performance design was S45 with lower variance, higher coverage  
15 for confidence intervals and lower variance ratio. This result can be explained by the fact that this  
16 design combines good parameter estimation properties of the random designs with good prediction  
17 properties of regular designs. In general coverages of confidence intervals were lower than the nominal  
18 95% level reflecting an underestimation of variance. Another interesting fact was the lower coverages  
19 of confidence intervals computed by sampling statistics for the random designs, for increasing spatial

20 correlation and sample size. This result illustrates that in the presence of spatial correlation, sampling  
21 statistics will underestimate variances according to the combined effect of spatial correlation and  
22 sampling density.

23 **Key-words:** bottom trawl surveys; geostatistics; simulation; hake; horse mackerel; sampling design.

## 24 1 Introduction

25 Fisheries surveys are an essential sampling process for the estimation of fish abundance as they provide  
26 independent information on the number and weight of fish that exist on a specific area and period.  
27 Moreover, this information can be obtained fully disaggregated along several biological dimensions like  
28 age, length, maturity status, etc. Like for any other sampling procedures, the quality of the data obtained  
29 depends greatly on the sampling design applied.

30 For the last 20 to 30 years, bottom trawl surveys (BTS) have been carried out in Western European  
31 waters using design-based strategies (Anon., 2002, 2003). However, if one assumes that the number of  
32 fish in a specific location is positively correlated with the number of fish in nearby locations, then a  
33 geostatistical model can be adopted for estimation and prediction and a model-based approach can be  
34 considered to define and assess the sampling design. On the other hand geostatistical principles are  
35 widely accepted and can be regarded as a natural choice for modelling fish abundance (e.g. see Rivoirard  
36 et al., 2000; Anon., 2004).

37 Thompson (1992) contrasts design-based and model-based approaches considering that under the former  
38 one assumes the values of the variable of interest are fixed and the selection probabilities for inference  
39 are introduced by the design, whereas under the latter one consider the observed properties of interest  
40 as realisations of random variables and carries out inference based on their joint probability distribution.  
41 Hansen et al. (1983) points the key difference between the two strategies by stating that design-based  
42 inference does not need to assume a model for the population, the random selection of the sample provides  
43 the necessary randomisation, while the model-based inference is made on the basis of an assumed model  
44 for the population, and the randomisation supplied by nature is considered sufficient. If the model is  
45 appropriate for the problem at hand there will be an efficiency gain in inference and prediction with  
46 model-based approaches, although model mis-specification can lead us to inaccurate conclusions. In our  
47 context, and with the experience accumulated over 20 years of bottom trawl surveys within the study  
48 area, a fairly complete picture exists of the characteristics of the fish assemblage in the area, so the risk  
49 of assuming an unreasonable model should be small.

50 Portuguese bottom trawl surveys (ptBTS) have been carried out on the Portuguese continental waters  
51 since June 1979 on board the R/V Noruega, twice a year in Summer and Autumn. The main objectives  
52 of these surveys are: (i) to estimate indices of abundance and biomass of the most important commercial  
53 species; (ii) to describe the spatial distribution of the most important commercial species, (iii) to collect  
54 information on individual biological parameters such as maturity, sex-ratio, weight, food habits, etc.  
55 The target species are hake (*Merluccius merluccius*), horse mackerel (*Trachurus trachurus*), mackerel  
56 (*Scomber scombrus*), blue whiting (*Micromessistius poutassou*), megrims (*Lepidorhombus boscii* and *L.*  
57 *whiffiagonis*), monkfish (*Lophius budegassa* and *L. piscatorius*) and Norway lobster (*Nephrops norvegi-*

58 *cus*). A Norwegian Campbell Trawl 1800/96 (NCT) with a codend of 20 mm mesh size, mean vertical  
59 opening of 4.8 m and mean horizontal opening between wings of 15.6 m has been used (Anon., 2002).

60 Between 1979 and 1980, a stratified random sampling design with 15 strata was adopted. Those strata  
61 were set based on depth and geographical areas. In 1981 the number of strata was revised to 36. In  
62 1989 the sampling design was reviewed and a new stratification was defined using 12 sectors along the  
63 Portuguese continental coast subdivided into 4 depth ranges: 20-100m, 101-200m, 201-500m and 501-750  
64 m, with a total of 48 strata. Due to constraints in the vessel time available for this survey, the sample size  
65 was established to total 97 locations, which were allocated equally split to obtain 2 locations in each  
66 stratum. The locations' coordinates were selected randomly, albeit constrained by the historical records  
67 of clear tow positions and other information about the sea floor, thus avoiding places where trawling  
68 was not possible. This sampling plan has been kept fixed since 1989. The tow duration was set until  
69 2001 as 60 minutes and was then reduced in 2002 to 30 minutes, based on an experiment that showed  
70 no significant differences in the mean abundance and length distribution between the two tow duration.

71 The main objective of the present work is to investigate proposals of new sampling designs for the Autumn  
72 Portuguese bottom trawl survey (ptBTS). We aim to explore new spatial configurations and possible  
73 increases on sample size, which could be achieved by e.g. reducing the hauling time (from 1 hour to 1/2  
74 hour). Secondly, we aim to describe a pragmatic procedure to build sampling designs for BTS, develop a  
75 statistical approach to compare sampling designs with different sample sizes and spatial configurations,  
76 and provide generalized results that could be used for other surveys and species. A simulation study  
77 was performed to compare the stratified random design which is currently used against five proposals  
78 of systematic based designs, which we have called *study designs*. A model based geostatistical approach  
79 (Diggle and Ribeiro, 2006) was adopted using likelihood based methods of inference and conditional  
80 simulations to estimate fish abundance on the study area.

81 Section 2 describes the framework for the simulation study starting with the model specifications followed  
82 by a description of the sampling designs and the setup for the simulation study, conducted in five steps as  
83 described in Section 2.3. The results of the simulation study comparing the study designs are presented  
84 in Section 3 and the findings are discussed in Section 4.

## 85 2 Methods

86 The survey area considered for this work corresponds to the Southwest of the Portuguese Continen-  
87 tal EEZ, between S.Vicente Cape ( $37.00^{\circ}lat$  north) and Setubal's Canyon ( $38.30^{\circ}lat$  north). Locations  
88 stored using the Mercator projection were transformed into an orthonormal space by converting longitude  
89 by the cosine of the mean latitude (Rivoirard et al., 2000). At Portuguese latitude ( $38-42^{\circ}$ )  $1^{\circ}lat \approx 60nm$ .

90 The area has  $\approx 1250nm^2$  and the maximum distance between two locations was  $\approx 81nm(1.35^\circ lat)$ .

## 91 2.1 Geostatistical framework

92 The spatial model assumed here is a log-Gaussian geostatistical model. This is a particular case of the  
 93 Box-Cox Gaussian transformed class of models discussed in Christensen et al. (2001). The data consist of  
 94 the pair of vectors  $(x, y)$  with elements  $(x_i, y_i) : i = 1, \dots, n$ , where  $x_i$  denote the coordinates of a spatial  
 95 location within a study region  $A \subset \mathbb{R}^2$  and  $y_i$  is the measurement of the abundance at this location.  
 96 Denoting by  $z_i$  the logarithm of this measurement, the Gaussian model for the vector of variables  $Z$  can  
 97 be written as:

$$Z(x) = S(x) + \varepsilon \quad (1)$$

98 where  $S(x)$  is a stationary Gaussian process at locations  $x$ , with  $E[S(x)] = \mu$ ,  $Var[S(x)] = \sigma^2$  and an  
 99 isotropic correlation function  $\rho(h) = Corr[S(x), S(x')]$ , where  $h = \|x - x'\|$  is the Euclidean distance  
 100 between the locations  $x$  and  $x'$ ; and the terms  $\varepsilon$  are assumed to be mutually independent and identically  
 101 distributed  $Gau(0, \tau^2)$ . For the correlation function  $\rho(h)$  we adopted the exponential function with  
 102 algebraic form  $\rho(h) = \exp\{-h/\phi\}$  where  $\phi$  is the correlation range parameter such that  $\rho(h) \simeq 0.05$   
 103 when  $h = 3\phi$ . Within the usual geostatistical *jargon* (Isaaks and Srivastava, 1989)  $\tau^2 + \sigma^2$  is the (total)  
 104 sill,  $\sigma^2$  is the partial sill,  $\tau^2$  is the nugget effect and  $3\phi$  is the practical range.

105 Hereafter we use the notation  $[\cdot]$  for *the distribution of* the quantity indicated within the brackets. The  
 106 adopted model defines  $[\log(Y)] \sim MVGau(\mu\mathbf{1}, \Sigma)$ , i.e  $[Y]$  is multivariate log-Gaussian with covariance  
 107 matrix  $\Sigma$  parametrised by  $(\sigma^2, \phi, \tau^2)$ . Parameter estimates can be obtained by maximum likelihood  
 108 (Diggle and Ribeiro, 2006). For spatial prediction consider first the prediction target  $T(x_0) = \exp\{S(x_0)\}$ ,  
 109 i.e. the value of the process in the original measurement scale at a vector of spatial locations  $x_0$ . Typically  
 110  $x_0$  defines a grid over the study area. From the properties of the model above the predictive distribution  
 111  $[T(x)|Y]$  is log-Gaussian with mean  $\mu_T$  and variance  $\sigma_T^2$  given by:

$$\begin{aligned} \mu_T &= \exp\{E[S(x_0)] + 0.5 \text{Var}[S(x_0)]\} \\ \sigma_T^2 &= \exp\{2 E[S(x_0)] + \text{Var}[S(x_0)]\}(\exp\{\text{Var}[S(x_0)]\} - 1) \end{aligned}$$

112 with

$$\begin{aligned} E[S(x_0)] &= \mu + \Sigma'_0 \Sigma^{-1} (Z - \mathbf{1}\mu) \\ \text{Cov}[S(x_0)] &= \Sigma - \Sigma'_0 \Sigma^{-1} \Sigma_0 \end{aligned}$$

113 where  $\Sigma_0$  is a matrix of covariances between the variables at prediction locations  $x_0$  and the data locations  
114  $x$  and  $\text{Var}[S(x_0)]$  are given by the diagonal elements of  $\text{Cov}[S(x_0)]$ . In practice, we replace the model  
115 parameters in the expressions above by their maximum likelihood estimates.

116 Under the model assumptions,  $[T|Y]$  is multivariate log-Gaussian and inferences about prediction means  
117 and variances, or other properties of interest, can be drawn either analytically or, more generally, through  
118 conditional simulations. Prediction targets can be specified as functionals  $\mathcal{F}(S)$  which are applied to the  
119 conditional simulations. For instance, inferences on the global mean of a particular realisation of the  
120 stochastic process over the area are obtained by defining  $x_0$  as a grid covering the study area at which  
121 conditional simulations of  $[S(x_0)|Y]$  are taken; the simulated values are then exponentiated and averaged.

## 122 2.2 Sampling designs

123 In general, survey sampling design is about choosing the sample size  $n$  and the sample locations  $x$   
124 from which data  $Y$  can be used to predict any functional of the process. In the case of the ptBTS some  
125 particularities must be taken into account: (i) the survey targets several species which may have different  
126 statistical and spatial behaviours; (ii) for each species several variables are collected (weight, length,  
127 number, etc.) that might be distributed differently due to age and sex-related aggregating behavior;  
128 (iii) the sampling is destructive and replicates can not be obtained; (iv) the variability of observed fish  
129 abundance is typically high, and (v) the planned sampling design may be unattained in practice due to  
130 unpredictable commercial fishing activity at the sampling area, weather conditions or other operational  
131 constraints.

132 Optimal designs can be obtained formally, by defining a criteria and finding the set of sampling locations  
133 which minimise some sort of loss function, as e.g. discussed in Diggle and Lophaven (2006). On the other  
134 hand, designs can be defined *informally* by arbitrarily defining locations which present a compromise  
135 between statistical principles and operational constraints. Both are valid for geostatistical inference as  
136 described in Section 2.1 provided that the locations  $x$  are fixed and stochastically independent of the  
137 observed variable  $Y$ . The above characteristics of the ptBTS make it very complex to set a suitable  
138 criterion to define a loss function to be minimized with relation to survey design. Additionally, vessel  
139 cost at sea is mainly day-based and not haul-based, so groups of locations instead of individual sampling  
140 points must be considered when altering sampling size. Therefore, our approach was to construct the  
141 proposed designs informally trying to accommodate: (i) historical information about hake and horse  
142 mackerel abundance distribution (Anon., 2002; Jardim, 2004), (ii) geostatistical principles about the  
143 estimation of correlation parameters (e.g. see Isaaks and Srivastava, 1989; Cressie, 1993; Muller, 2001)  
144 and (iii) operational constraints like known trawlable grounds and minimum distance between hauls.

145 The *study designs* included the design currently adopted for this survey, named “ACTUAL” with 20

146 locations, and five systematic based sampling designs. The systematic based designs were defined based  
147 on two possible increments in the sample size: a  $\approx 40\%$  increment, which is expected to be achievable in  
148 practice by reducing haul time from 1 hour to 1/2 hour; and a  $\approx 60\%$  increment, which could be achieved  
149 in practice by adding to the previous increment an allocation of higher sampling density to this area in  
150 order to cover the highest variability of hake recruits historically found within this zone. These designs  
151 are denoted by “S” followed by a number corresponding to the sample size. For the former increment a  
152 regular design named “S28” was proposed and for the latter three designs were proposed: “S45” overlaps  
153 the designs ACTUAL and S28, allowing direct comparison with the previous designs; “S44” and “S47”  
154 are two infill designs (Diggle and Lophaven, 2006) obtained by augmenting S28 with a set of locations  
155 positioned regularly at smaller distances, aiming to better estimate the correlation parameter and, in  
156 particular, the noise-to-signal ratio. S44 was built by defining a single denser sampling zone and S47 by  
157 adding three areas with denser sampling. A sixth design “S108” was defined to be used as reference with  
158 twice the density of S28.

159 The designs proposed differ in both size and spatial configuration and a simple analysis of any statistic  
160 thus obtained would be confounded by these two effects. This situation motivated the development of a  
161 statistical approach to compare designs with different sample sizes and spatial configurations. We used  
162 a *ratio of variances* of the relevant estimators between pairs of study designs and random designs with  
163 the same sample size, isolating in this way the spatial configuration effect. To carry out this analysis we  
164 built six additional designs with the same sample size as the study designs and with locations randomly  
165 chosen within the study area. We denote these by “R” followed by the number of corresponding locations.  
166 Each random design contains all the locations of the previous one such that the results are comparable  
167 without the effect of the random allocation of sampling sites.

168 The *study* and corresponding *random* designs are shown in Figure 1.

## 169 2.3 Simulation study

170 The simulation study was carried out in five steps as follows.

171 **Step 1 Define a set of study designs.** The sampling designs described in Section 2.2 are denoted  
172 by  $\Lambda_d : d = 1, \dots, 12$ , with  $d = 1, \dots, 6$  for the study designs and  $d = 7, \dots, 12$  for the  
173 corresponding random designs, respectively.

174 **Step 2 Define a set of correlation parameters.** Based on the analysis of historical data of hake  
175 and horse mackerel spatial distribution and defining  $\tau_{REL}^2 = \tau^2 / (\tau^2 + \sigma^2)$ , a set of model pa-  
176 rameters  $\theta_p : p = 1, \dots, P$  was defined by all combinations of  $\tau_{REL}^2 = \{0, 0.1, 0.2, 0.3, 0.4, 0.5\}$



177 and  $\phi = \{0.05, 0.1, 0.15, 0.2, 0.25, 0.3, 0.35, 0.4\}$  *olat*. The values of  $\sigma^2$  are given by setting  
 178  $\sigma^2 + \tau^2 = 1$ .

179 **Step 3 Simulate data.** For each parameter set  $\theta_p$  we obtained S=200 simulations  $Y_{ps} : s = 1, \dots, S$   
 180 from  $[Y]$  on a regular grid of 8781 locations under the model described in Section 2.1. Each  
 181 simulation  $Y_{ps}$  approximates a possible realisation of the process within the study area from  
 182 which we computed the mean value  $\mu_{ps}$ . For each  $Y_{ps}$  we extracted the data  $Y_{pds}$  at the  
 183 locations of the sampling designs  $\Lambda_d$ .

184 **Step 4 Estimate correlation parameters.** For each  $Y_{pds}$  obtain maximum likelihood estimates  
 185 (MLE's)  $\tilde{\theta}_{pds}$  of the model parameter.

186 **Step 5 Simulating from the predictive distribution.** A prediction grid  $x_0$  with 1105 locations  
 187 and the estimates  $\tilde{\theta}_{psd}$  were used to obtain C=150 simulations  $\tilde{Y}_{pdsc} : c = 1, \dots, C$  of the  
 188 conditional distribution  $[T(x_0)|Y]$  which were averaged to produce  $\tilde{\tilde{Y}}_{pdsc}$ .

## 189 2.4 Analysis of simulation results

190 The simulation study requires maximum likelihood estimates for the model parameters which are obtained  
 191 numerically. Therefore a set of summary statistics was computed in order to check the results' consistency.  
 192 We have recorded rates of non-convergence of the minimization algorithm; estimates which coincided with  
 193 the limiting values imposed to the minimization algorithm ( $\phi = 3$  and  $\tau_{REL}^2 = 0.91$ ); absence of spatial  
 194 correlation ( $\phi = 0$ ) and values of the parameter estimates which are considered atypical for the problem  
 195 at hand ( $\phi > 0.7$  and  $\tau_{REL}^2 > 0.67$ ).

196 The 48 parameter sets ( $\theta_p$ ), 12 sampling designs ( $\Lambda_d$ ), 200 data simulations ( $Y_{psd}$ ) and 150 conditional  
 197 simulations ( $\tilde{Y}_{pdsc}$ ) produced 17.28 million estimates of abundance. For each design we have computed  
 198 the estimator  $\tilde{\mu}_{psd} = C^{-1} \sum_c \tilde{\tilde{Y}}_{pdsc}$  of mean abundance  $\mu_{ps}$  which has variance  $\text{Var}(\tilde{\mu}_{psd}) = \bar{\rho}_{AA} +$   
 199  $\sum_i^n \sum_j^n w_i w_j \tilde{\rho}_{ij} - 2 \sum_i^n w_i \bar{\rho}_{iA}$ , where  $\bar{\rho}_{AA}$  is the mean covariance within the area, estimated by the  
 200 average covariance between the prediction grid locations ( $x_0$ );  $w$  are kriging weights;  $\tilde{\rho}_{ij}$  is the covariance  
 201 between a pair of data locations; and  $\bar{\rho}_{iA}$  is the average covariance between each data locations and the  
 202 area discretized by the prediction grid  $x_0$  (Isaaks and Srivastava, 1989).

203 We used bias, relative bias, mean square error (MSE), confidence intervals coverage and ratio of variances  
 204 to assess the simulation results, comparing the estimates of abundance provided by the different study  
 205 designs. For each design these statistics were averaged over all the simulations ( $s$ ) and parameter sets  
 206 ( $p$ ) or groups of parameters sets. Considering the difference between the abundance estimates  $\tilde{\mu}_{psd}$  and  
 207 simulated means  $\mu_{ps}$ , bias was computed by the difference, relative bias was computed by the difference  
 208 over the estimate  $\tilde{\mu}_{ps}$  and MSE was computed by the mean square of the difference. For each estimate

209  $\tilde{\mu}_{pds}$  a 95% confidence interval for  $\mu_{ps}$ , given by  $CI(\tilde{\mu}_{psd}) = \tilde{\mu}_{psd} \pm 1.96\sqrt{Var(\tilde{\mu}_{psd})}$ , was constructed  
 210 and the coverage of the confidence intervals  $\delta$  were computed as the proportion of the intervals which  
 211 contained the value of  $\mu_{ps}$  over all the simulations. This statistic was introduced to help assessing the  
 212 quality of the variance estimates. Next, we called *ratio of variances* a statistic  $\xi$  obtained by dividing the  
 213 variance  $Var(\tilde{\mu}_{psd})$  of each study design by the random design with the same size. Notice that the single  
 214 difference among each pair of designs with the same size was the spatial configuration of the locations  
 215 and  $\xi$  isolated this effect. Finally we used the results from the six random designs to contrast sampling  
 216 design based and geostatistical based estimates.

217 All the analysis were performed using the R software (R Development Core Team, 2005) and the add-on  
 218 packages `geoR` (Ribeiro Jr. and Diggle, 2001) and `RandomFields` (Schlather, 2001).

### 219 3 Results

220 Table 1 summarises the analysis of historical data showing parameter estimates for a sequence of years.  
 221 This aims to gather information on reasonable values for the model parameters. Notice that units for  $\phi$   
 222 are given in degrees and, for the adopted exponential correlation model, the practical range in nautical  
 223 miles ( $r$ ) is given by  $3\phi$ . The values of  $\tau_{REL}^2 = 1$  estimated in some years indicate an uncorrelated spatial  
 224 process and for such cases estimates of  $\phi$  equals to zero. For most cases  $\tau_{REL}^2$  was estimated as zero due  
 225 to the lack of nearby locations in the sampling plan and the behaviour of the exponential correlation  
 226 function at short distances. Given that there is no information in the data about the spatial correlation  
 227 at distances smaller than the smallest separation distance between a pair of location, this parameter can  
 228 not be estimated properly and the results depend on the behaviour of the correlation function near the  
 229 origin.

230 Table 2 presents results used for checking the reliability of the parameter estimates and the possible  
 231 impact on prediction results. The highest rate of lack of convergence was 0.6% for designs ACTUAL and  
 232 R20. Estimates of  $\phi$  constraint by the upper limit imposed to the algorithm were, in the worst case, 0.9%  
 233 for R28 and R47 while for  $\tau_{REL}^2$  it was 1.2% for R28. In general there was a slightly worst performance of  
 234 the random designs but this is irrelevant for the objectives of this study. The above simulations were not  
 235 considered for subsequent analysis. Lack or weak spatial correlation given by  $\phi = 0$  and/or  $\tau_{REL}^2 > 0.67$   
 236 were found in about 35% of the simulations for the designs with fewer number of locations. This rate  
 237 decreases as the sample size increases down to below 10% for the largest designs. For both statistics  
 238 the study designs showed slightly higher values than the corresponding random designs. Identification of  
 239 weakly correlated spatial processes in part of the simulations was indeed expected to occur given the low  
 240 values of  $\phi$  (0.05 and 0.1) and high values of  $\tau_{REL}^2$  (0.5) used in the simulations. The number of cases

241 that presented  $\phi > 0.7$  were slightly higher for random designs, with a maximum of 2.6% for R44 and  
242 R45, but were considered to be within an acceptable range given the high variability of the estimator.  
243 Our overall conclusion was that the estimation procedure and algorithms produced parameter estimates  
244 which can be trusted for subsequent analysis.

245 Figure 2 shows square bias, variance and MSE obtained from the estimates of correlation parameters  $\phi$   
246 and  $\tau_{REL}^2$ . For  $\tau_{REL}^2$  the majority of the designs presented similar patterns with a small contribution of  
247 bias to the MSE and increasing values of MSE for higher parameter values. The designs ACTUAL, S28  
248 and R20 behaved differently with higher values of bias at low values of  $\tau_{REL}^2$  that pushed MSE to higher  
249 values. As an effect of the sample sizes, the absolute values of MSE define 3 groups composed by designs  
250 with 20 and 28 locations, designs with 44, 45 and 47 locations, and designs with 108 locations; with  
251 decreasing values of MSE among them, respectively. MSE increases with the increase of the true value  
252 of  $\phi$  and its absolute value decreases slightly with the increasing sample sizes. All designs presented a  
253 similar pattern with the variance contributing more than bias to the MSE. The study designs showed a  
254 slightly higher relative contribution of the variance to MSE compared with the random designs.

255 Table 3 shows geostatistical abundance estimates ( $\tilde{\mu}$ ) and their bias, relative bias, variance, MSE and  
256 95% confidence interval coverage for both sets of designs. Additionally the table also shows design-based  
257 statistics for random designs. For subsequent analysis the designs S108 and R108 were regarded just as  
258 benchmarks since they are unrealistic for practical implementation. Bias was quite small in all situations  
259 and can be considered negligible; the highest relative bias value was 0.014 for S28. All random designs  
260 showed a negative bias whereas all study designs showed a positive one. Variances estimated by study  
261 designs were lower than the ones for the corresponding random designs. For random designs the variance  
262 decays with increasing sample sizes, whereas study designs behaved differently with S45 presenting the  
263 lowest variance followed by S47, S44, S28 and S20. MSE showed the same pattern since bias was small,  
264 supporting our claim that bias is not relevant for the purpose of this work. The coverages of confidence  
265 intervals ( $\delta$ ) were lower than the nominal level of 95% except for S108 and R108, reflecting a possible  
266 underestimation of variance. Considering the designs individually it can be seen that underestimation  
267 using ACTUAL, S28 and S45 was actually lower than with the equivalent random designs. To better  
268 investigate this, Figure 3 presents values of  $\delta$  splitted by three levels of correlation (low={0.05, 0.1},  
269 med={0.15, 0.20, 0.25}, high={0.3, 0.35, 0.4}). The estimates of  $\delta$  with geostatistical methods increased  
270 with higher correlation levels and larger sample sizes, whereas with sampling statistics there is a decrease  
271 in confidence interval coverage with higher levels of correlation and larger sample sizes, reflecting a more  
272 pronounced underestimation of variance.

273 Logarithms of the variance ratios between corresponding “S” and “R” designs are presented in Table 3.  
274 Without considering S108 for the reasons stated before, the best result was found for S45 (-0.208)

275 and the worst for S28 ( $-0.108$ ). This must be balanced by the fact that S45 showed a lower variance  
276 underestimation than R45, with the opposite happening for S44/R44 and S47/R47, so, in reality, the  
277 value of  $\xi$  is smaller for S45 than for S44 and S47.

## 278 4 Discussion

279 The choice of sampling designs for BTS is subject to several practical constraints and this has motivated  
280 the adoption of *informally* defined designs which accommodated several sources of information like fishing  
281 grounds, haul duration, previous knowledge of the spatial distribution of hake and horse mackerel, among  
282 others, which could not be incorporated into a design criteria in an objective way. The fact that this can  
283 generate designs with different sample sizes is a drawback of this approach. However, implementation of  
284 systematic designs on irregular spatial domains is likely to provide different sample sizes, depending on  
285 the starting location. On the other hand, costs of hauling are relatively small when compared with the  
286 fixed costs associated with a vessel's working day and increasing sample sizes for a BTS should consider  
287 sets of locations which can be sampled in one working day. For these reasons the different sample sizes  
288 of each design are not just a feature of the adopted approach but also a result of the BTS particularities.

289 The confounding effects of sample size and spatial configuration of the proposed designs jeopardized  
290 the comparison of their ability in estimating abundance. To overcome this limitation a methodology to  
291 compare designs with different sample sizes and spatial configurations was required. To deal with this  
292 issue we have introduced a mean abundance variance ratio statistic, between the study designs and a  
293 simulated random design with the same sample size.

294 Spatial analysis in fisheries science is mostly concerned with: (i) predicting the distribution of the marine  
295 resource, aiming, for instance, to define areas of high abundance of a given age, sex or maturity status,  
296 for the purpose of protection; and (ii) to compute abundance indices for stock assessment models (Anon.,  
297 2004). For such situations the model parameters are not the object of study, but just a device to better  
298 predict abundance. Muller (2001) points out that the optimality of spatial sampling designs depends  
299 on the given objectives, showing that ideal designs to estimate covariance parameters of the stochastic  
300 process are not the same that would best predict the value of the stochastic process in a specific location  
301 and/or estimate global abundance. We have not compared the various study designs with respect to  
302 their estimates of the covariance parameters as our main concern was spatial prediction of abundance.

303 The choice of the parameter estimation method was a relevant issue in the context of this work. The  
304 absence of a formal criteria to identify the "best" design naturally led to the use of geostatistical simula-  
305 tions to compare the proposed designs. To carry out a simulation study it is useful to have an objective  
306 method capable of producing single estimates of the model parameters. Within traditional geostatistical

307 methods (Isaaks and Srivastava, 1989; Cressie, 1993; Goovaerts, 1997; Rivoirard et al., 2000) estimation  
308 usually involves the subjective intervention of the analyst to define some empirical variogram parame-  
309 ters such as lag interval, lag tolerance and an estimator for the empirical variogram. Likelihood based  
310 inference produces estimates of the covariance parameters without a subjective intervention of the data  
311 analyst, allowing for automatization of the estimation process, which makes it suitable for simulation  
312 studies. For this work we have also tested other model fitting methods such as restricted maximum  
313 likelihood (REML) and weighted least squares, but they have produced worse rates of convergence in  
314 the simulation study. In particular REML was highly unstable with a high frequency of atypical re-  
315 sults for  $\phi$ . An aspect of parameter estimation for geostatistical models which is highlighted when using  
316 likelihood based methods concerns parameter identification due to over-parametrized or poorly identifi-  
317 able models (see e.g. Zhang, 2004). To avoid over-parametrization we used log-transformation, and the  
318 process was considered isotropic, avoiding the inclusion of three parameters on the model: the box-cox  
319 transformation parameter (Box and Cox, 1964) and the two anisotropy parameters, angle and ratio. The  
320 choice of the log transformation was supported by the analysis of historical data and does not impact the  
321 comparison of the designs, given that the relative performance of each design will not be affected by the  
322 transformation. A point of concern with the log transformation was the existence of zero values which,  
323 in the analysis of the historical data, were treated as measurement error and included in the analysis by  
324 adding a small amount to all observations. However, it must be noted this is not always recommended  
325 and, in particular, if the stock is concentrated on small schools that cause discontinuities on the spa-  
326 tial distribution, these transformations will not produce satisfactory results. Concerning anisotropy, a  
327 complete simulation procedure was carried out considering a fixed anisotropy angle on the north-south  
328 direction and an anisotropy ratio of 1, 1.5 or 2. As expected, the absolute values obtained were different  
329 but the overall relative performance was the same, supporting our decision to report results only for the  
330 isotropic model.

331 A major motivation for performing a simulation study was the possibility to use a wide range of covari-  
332 ance parameters that reflect different spatial behaviours. We used, to define the range of the parameters  
333 for simulation, two species with different aggregation patterns, hake and horse mackerel: the first an  
334 ubiquitous species not usually found in dense aggregations, the second a schooling species. The similar-  
335 ities found suggest that these results can be extended to other species with spatial behavior compatible  
336 with the covariance parameters used here.

337 From a space-time modeling perspective, one of the most interesting analysis for fisheries science is the  
338 fluctuation of the stochastic process over time contrasted with the specific realization in a particular time.  
339 Therefore the comparison of individual results with the mean of the realisations ( $\mu_{ps}$ ) was considered  
340 more relevant than to the mean of the underlying process ( $\mu$ ) for the computation of bias and variability.  
341 The results showed higher bias for study designs when compared with random designs, but in both cases

342 showing low values which were considered negligible for the purposes of this work.

343 Apart from design S108, which was introduced as a benchmark and not suitable for implementation,  
344 the design that performed better was S45, which presented lower variance, confidence interval coverages  
345 closer to the nominal level of 95% and lower variance ratio (Table 3). One possible reason is the balance  
346 between good estimation properties given by the random locations and good predictive properties given  
347 by the systematic locations, however the complexity of the BTS objectives makes it impossible to find a  
348 full explanation for this results. A possible indicator of the predictive properties is the average distance  
349 between the designs and the prediction grid locations, which reflects the extrapolation needed to predict  
350 over a grid. We found that S45 had an average of  $2.61nm$  whereas for S47 the value is  $2.72nm$ , explaining  
351 in part the S45 performance. These results are in agreement with Diggle and Lophaven (2006) who showed  
352 that *lattice plus closed pairs* designs (similar to S45) performed better than *lattice plus in-fill* designs  
353 (similar to S44 and S47) for accurate prediction of the underlying spatial phenomenon. The combination  
354 of random and systematic designs like S45 is seldom considered in practice and we are not aware of  
355 recommendations of such designs for BTS.

356 It was interesting to notice that most designs presented a coverage of confidence intervals below the  
357 nominal level of 95% indicating that variances were underestimated. It was not fully clear how to use  
358 such results to correct variance estimation and further investigation is needed on the subject. Care must  
359 be taken when looking at variance ratios since underestimated denominators will produce higher ratios  
360 which can mask the results. This was the case of S45 when compared to S47 and S44, thus supporting  
361 our conclusions about S45.

362 Another result of our work was the assessment of abundance estimates from random designs by sampling  
363 statistics, the most common procedure for fisheries surveys (Anon., 2004), under the presence of spatial  
364 correlation. In such conditions an increase in sample size may not provide a proportional increase in  
365 the quantity of information due to the partial redundancy of information under spatial correlation. Re-  
366 sults obtained for coverages of confidence intervals illustrated this (Table 3 and Figure 3), with smaller  
367 coverages for larger sample sizes and higher spatial correlation. In our opinion this is due to an overesti-  
368 mation of the degrees of freedom that lead to an underestimation of prediction standart errors producing  
369 the smaller coverages. These findings support claims to consider geostatistical methods to estimate fish  
370 abundance so that correlation between locations is explicitly considered in the analysis.

## 371 5 Acknowledgements

372 The authors would like to thank the scientific teams involved in the Portuguese Bottom Trawl Surveys,  
373 in particular the coordinator Fátima Cardador. We also thank comments by Manuela Azevedo and Iago

374 Mosqueira. This work was carried out within the IPIMAR's project NeoMAv (QCA-3/MARE-FEDER,  
375 <http://ipimar-iniap.ipimar.pt/neomav>) and was co-financed by project POCTI/MATH/44082/2002.

## 376 References

377 Anon., 2002. Report of the International Bottom Trawl Survey Working Group. Tech. rep., International  
378 Council for the Exploitation of the Sea (ICES), ICES CM 2002/D:03.

379 Anon., 2003. Report of the International Bottom Trawl Survey Working Group. Tech. rep., International  
380 Council for the Exploitation of the Sea (ICES), ICES CM 2003/D:05.

381 Anon., 2004. Report of the Workshop on Survey Design and Data Analysis. Tech. rep., International  
382 Council for the Exploitation of the Sea (ICES), ICES CM 2004/B:07.

383 Box, G., Cox, D., 1964. An Analysis of Transformations. *Journal of the Royal Statistical Society Series*  
384 *B* 26, 211–243.

385 Christensen, O., Diggle, P., Ribeiro Jr, P., 2001. Analysing positive-valued spatial data: the transformed  
386 gaussian model. In: Monestiez, P., Allard, D., Froidevaux (Eds.), *GeoENV III - Geostatistics for*  
387 *Environmental Applications*. Vol. 11 of *Quantitative Geology and Geostatistics*. Kluwer, pp. 287–298.

388 Cressie, N., 1993. *Statistics for spatial data - Revised Edition*. John Wiley and Sons, New York.

389 Diggle, P. J., Lophaven, S., 2006. Bayesian geostatistical design. *Scandinavian Journal of Statistics* 33,  
390 55–64.

391 Diggle, P., Ribeiro, P., 2006. *Model-based Geostatistics*. Springer, New York, in press.

392 Goovaerts, P., 1997. *Geostatistics for Natural Resources Evaluation*. Oxford University Press, New York.

393 Hansen, M., Madow, W., Tepping, B., 1983. An Evaluation of Model-Dependent and Probability-  
394 Sampling Inferences in Sample Surveys. *Journal of the American Statistical Association* 78 (384),  
395 776–793.

396 Isaaks, E., Srivastava, M., 1989. *An Introduction to Applied Geostatistics*. Oxford University Press, New  
397 York.

398 Jardim, E., 2004. Visualizing hake recruitment - a non-stationary process. In: Sanchez-Vila, X., Carrera,  
399 J., Gómez-Hernández, J. J. (Eds.), *geoENV IV - Geostatistics for Environmental Applications*. Vol. 13  
400 of *Quantitative Geology and Geostatistics*. Kluwer Academic Publishers, London, pp. 508–509.

401 Muller, W., 2001. *Collecting Spatial Data - Optimum Design of Experiments for Random Fields*, 2nd  
402 Edition. *Contributions to statistics*. Physica-Verlag, Heidelberg.

403 Ribeiro Jr., P., Diggle, P., June 2001. geoR: a package from geostatistical analysis. R-NEWS 1 (2), 15–18.  
404 URL <http://cran.R-project.org/doc/Rnews>

405 Rivoirard, J., Simmonds, J., Foote, K., Fernandes, P., Bez, N., 2000. Geostatistics for Estimating Fish  
406 Abundance. Blackwell Science, London, England.

407 R Development Core Team, 2005. R: A language and environment for statistical computing. R Foundation  
408 for Statistical Computing, Vienna, Austria, ISBN 3-900051-07-0.  
409 URL <http://www.R-project.org>

410 Schlather, M., June 2001. Simulation and analysis of random fields. R News 1 (2), 18–20.  
411 URL <http://CRAN.R-project.org/doc/Rnews/>

412 Thompson, S., 1992. Sampling. Statistics. John Wiley & Sons, INC, New York.

413 Zhang, H., 2004. Inconsistent estimation and asymptotically equal interpolations in model-based geo-  
414 statistics. Journal of the American Statistical Association 99 (465), 250 – 261.



Table 1: Exponential covariance function parameters ( $\phi, \tau_{\text{REL}}^2$ ) and the geostatistical range (r) estimated yearly (1990-2004) for hake and horse mackerel abundance. The values of  $\phi$  are presented in degrees of latitude and range in nautical miles. The maximum distance between pairs of locations was 63nm.

	Hake			Horse mackerel		
	$\phi(^{\circ}\text{lat})$	r(nm)	$\tau_{\text{REL}}^2$	$\phi(^{\circ}\text{lat})$	r(nm)	$\tau_{\text{REL}}^2$
1990	0.05	9.1	0.01	0.42	76.4	0.00
1991	0.14	24.4	0.63	0.49	88.9	0.43
1992	0.00	0.0	1.00	0.22	39.3	0.05
1993	0.05	9.3	0.00	0.00	0.0	1.00
1995	0.05	8.8	0.00	0.08	14.4	0.00
1997	0.14	24.8	0.00	0.21	38.6	0.42
1998	0.02	3.4	0.00	0.09	16.5	0.00
1999	0.10	17.8	0.00	0.09	16.0	0.00
2000	0.03	4.6	0.00	0.16	29.5	0.00
2001	0.07	12.9	0.00	0.42	75.7	0.06
2002	0.00	0.0	1.00	0.05	8.9	0.00
2003	0.33	59.0	0.00	0.34	62.0	0.00
2004	0.09	15.4	0.00	0.09	17.0	0.00

Table 2: Simulations quality assessment statistics (in percentages) for both design sets and all sample sizes: non-convergence of the minimization algorithm (non-conv); cases truncated by the limits imposed to the minimization algorithm ( $\phi = 3$  and  $\tau_{\text{REL}}^2 = 0.91$ ); uncorrelated cases ( $\phi = 0$ ); and atypical values of the correlation parameters ( $\phi > 0.7$  and  $\tau_{\text{REL}}^2 > 0.67$ ).

statistic	design	sample size					
		20	28	44	45	47	108
non-conv	study	0.6	0.5	0.2	0.2	0.2	0.1
	random	0.6	0.4	0.2	0.2	0.2	0.1
$\phi = 3$	study	0.7	0.5	0.7	0.7	0.5	0.2
	random	0.6	0.9	0.8	0.8	0.9	0.1
$\tau_{\text{REL}}^2 = 0.91$	study	0.7	0.7	1.0	0.9	0.8	0.4
	random	0.8	1.2	1.1	1.1	1.1	0.2
$\phi = 0$	study	36.3	33.0	20.7	20.6	18.0	5.3
	random	32.8	28.5	18.1	17.2	16.2	3.3
$\phi > 0.7$	study	1.3	1.6	1.9	1.9	1.8	1.4
	random	1.8	2.2	2.6	2.6	2.4	1.7
$\tau_{\text{REL}}^2 > 0.67$	study	38.5	35.8	24.2	24.7	21.8	10.0
	random	35.0	31.6	22.1	21.1	20.3	7.6

Table 3: Summary statistics per sets of sampling designs and sample size. Geostatistical abundance estimates ( $\tilde{\mu}$ ) in kg/hour, bias ( $\text{bias}(\tilde{\mu})$ ), relative bias ( $\text{bias}_r(\tilde{\mu})$ ), variance ( $\text{var}(\tilde{\mu})$ ), mean square error (MSE) and 95% confidence interval coverage ( $\delta(\tilde{\mu})$ ). Mean log variance ratios per sampling design type ( $\xi$ ) measures the relative log effect of the systematic based designs configuration with relation to the random designs. The last six rows present the same statistics estimated for random designs by sampling statistics.

method	statistic	design	number of locations					
			20	28	44	45	47	108
geostatistics	$\tilde{\mu}$	study	1.658	1.662	1.649	1.657	1.651	1.641
		random	1.631	1.624	1.625	1.624	1.625	1.625
	$\text{bias}(\tilde{\mu})$	study	0.025	0.030	0.016	0.026	0.019	0.008
		random	-0.001	-0.008	-0.007	-0.009	-0.008	-0.007
	$\text{bias}_r(\tilde{\mu})$	study	0.012	0.014	0.003	0.012	0.005	0.001
		random	-0.004	-0.008	-0.005	-0.006	-0.005	-0.005
	$\text{var}(\tilde{\mu})$	study	0.136	0.108	0.092	0.086	0.089	0.081
		random	0.168	0.129	0.113	0.112	0.112	0.097
	MSE( $\tilde{\mu}$ )	study	0.272	0.196	0.164	0.144	0.154	0.104
		random	0.321	0.230	0.173	0.171	0.171	0.124
	$\delta(\tilde{\mu})$	study	0.908	0.922	0.907	0.939	0.920	0.960
		random	0.895	0.909	0.937	0.934	0.934	0.954
$\xi$	stu/rnd	-0.128	-0.107	-0.150	-0.208	-0.179	-0.228	
sampling statistics	$\bar{Y}$	random	1.615	1.619	1.618	1.616	1.618	1.622
	$\text{bias}(\bar{Y})$	random	-0.017	-0.014	-0.014	-0.017	-0.015	-0.010
	$\text{bias}_r(\bar{Y})$	random	-0.017	-0.014	-0.013	-0.014	-0.014	-0.006
	$\text{var}(\bar{Y})$	random	0.197	0.146	0.091	0.088	0.085	0.037
	MSE( $\bar{Y}$ )	random	4.133	4.238	4.109	4.083	4.090	4.073
	$\delta(\bar{Y})$	random	0.900	0.910	0.908	0.900	0.896	0.840

Figure 1: Sampling designs and the study area (southwest of Portugal). Each plot shows the sample locations, the bathymetric isoline of 500m and 20m and the coast line. The sampling design name is presented on the top left corner of the plots. The top row shows the *study* designs and the bottom row the random designs.

Figure 2: Summary statistics for the covariance parameters estimation by sampling design as a function of the true parameter values. bias<sup>2</sup> (◦), variance (△) and mean square error (+). Top figure presents  $\tau_{REL}^2$  results and bottom figure  $\phi$ .

Figure 3: Coverage of the confidence intervals ( $\delta$ ) for different  $\phi$  levels (low = {0.05, 0.1}, med{0.15, 0.20, 0.25} high = {0.30, 0.35, 0.40}) for estimates of abundance by sampling statistics for the random designs (+) and by geostatistics for the study (◦) and random designs (\*).

FIGURE 01

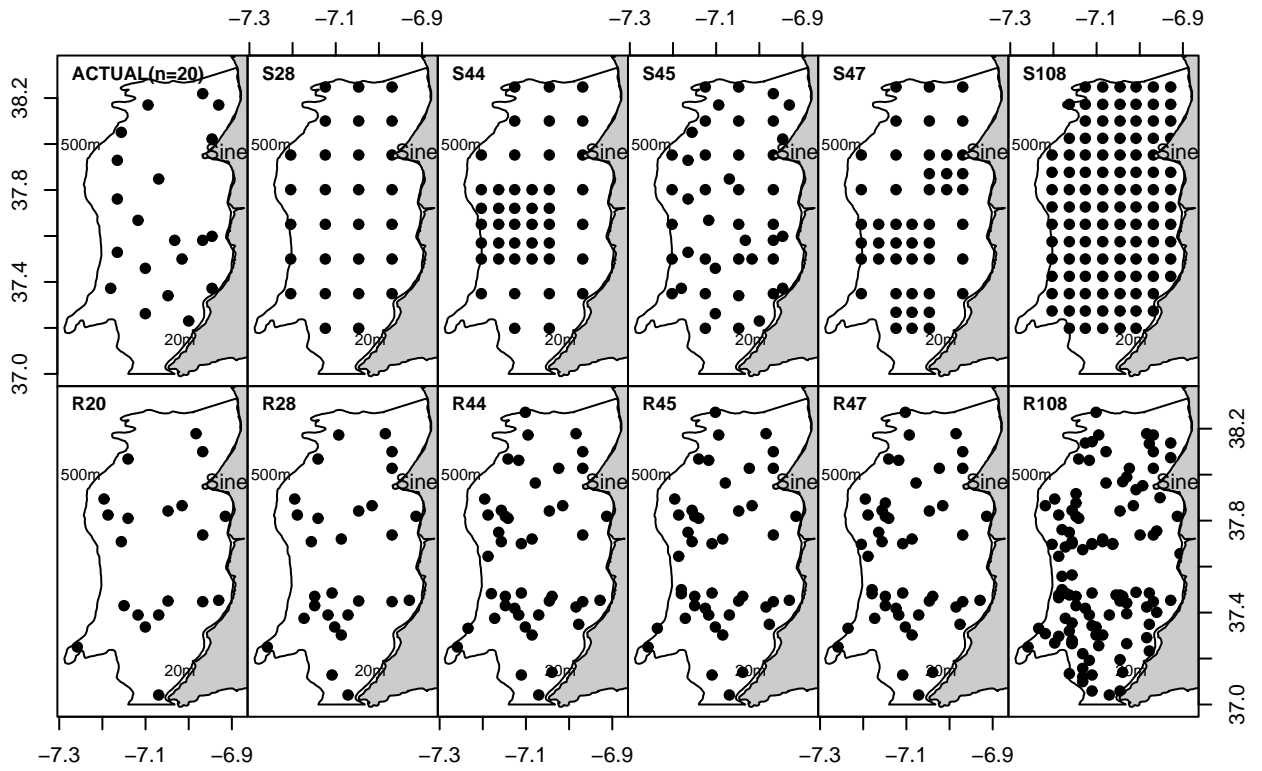


FIGURE 02

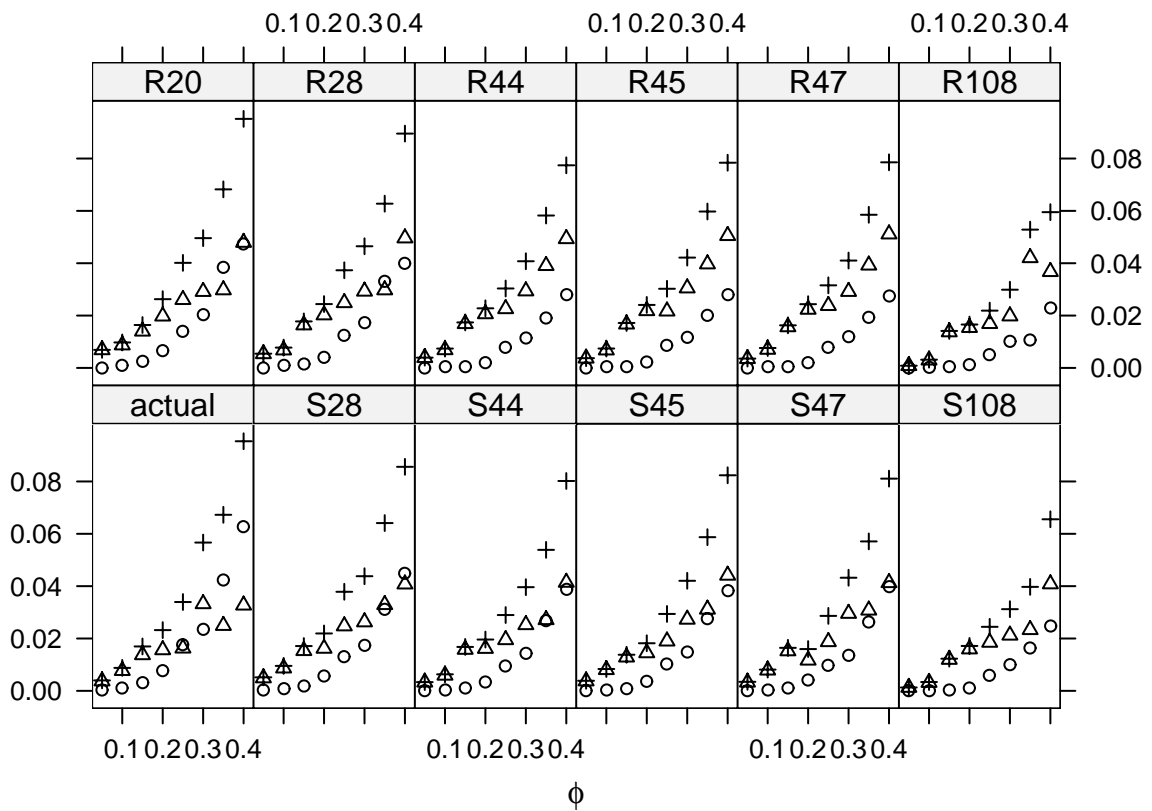
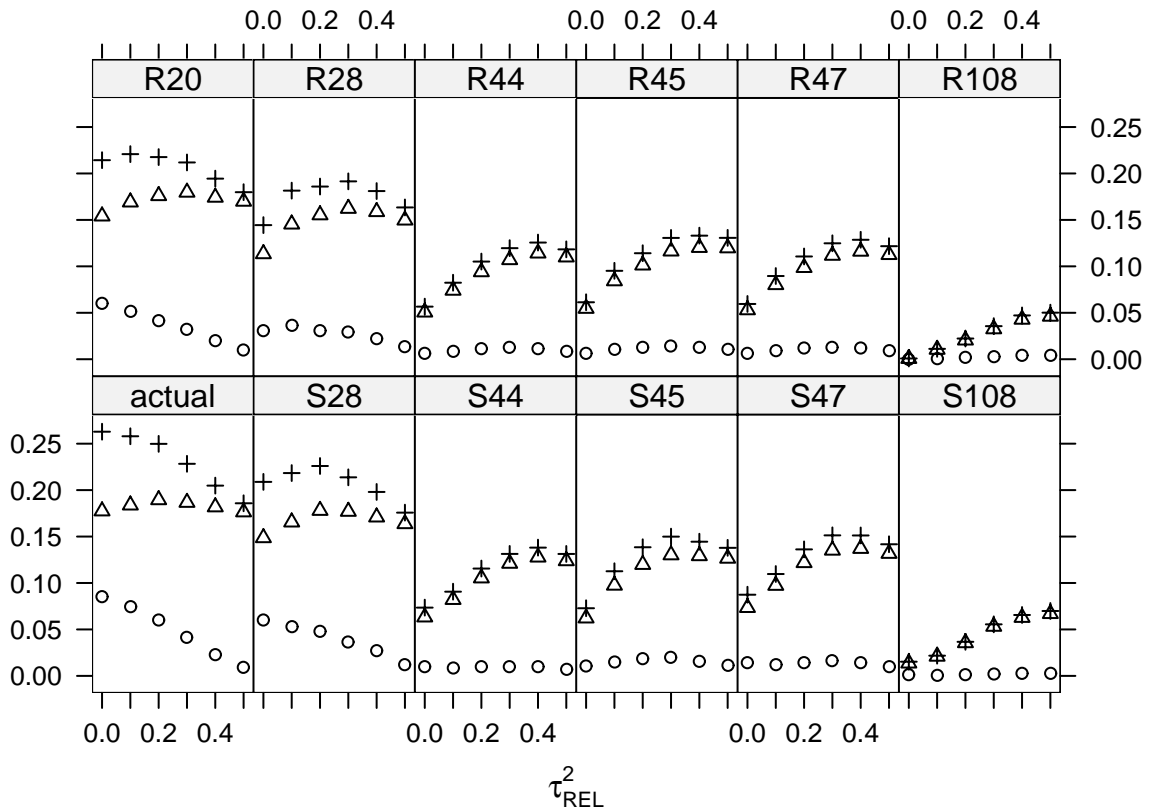


FIGURE 03

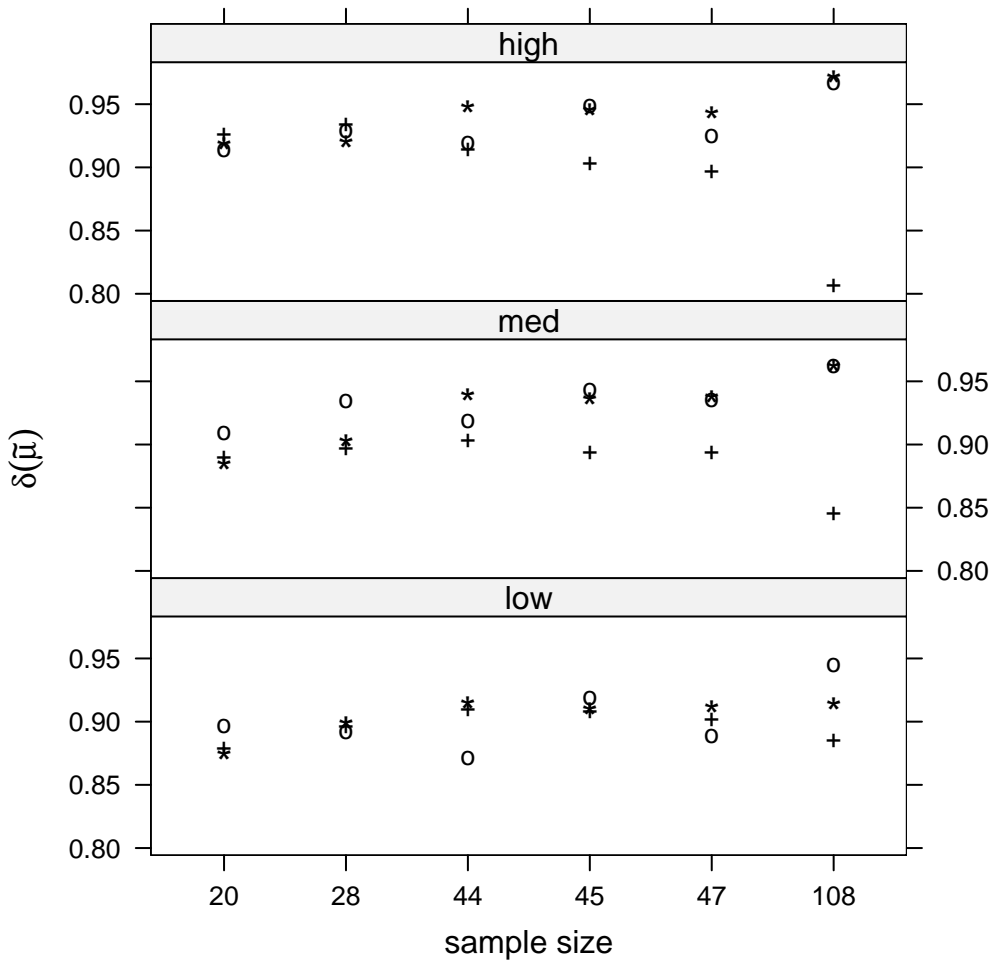


Figure01

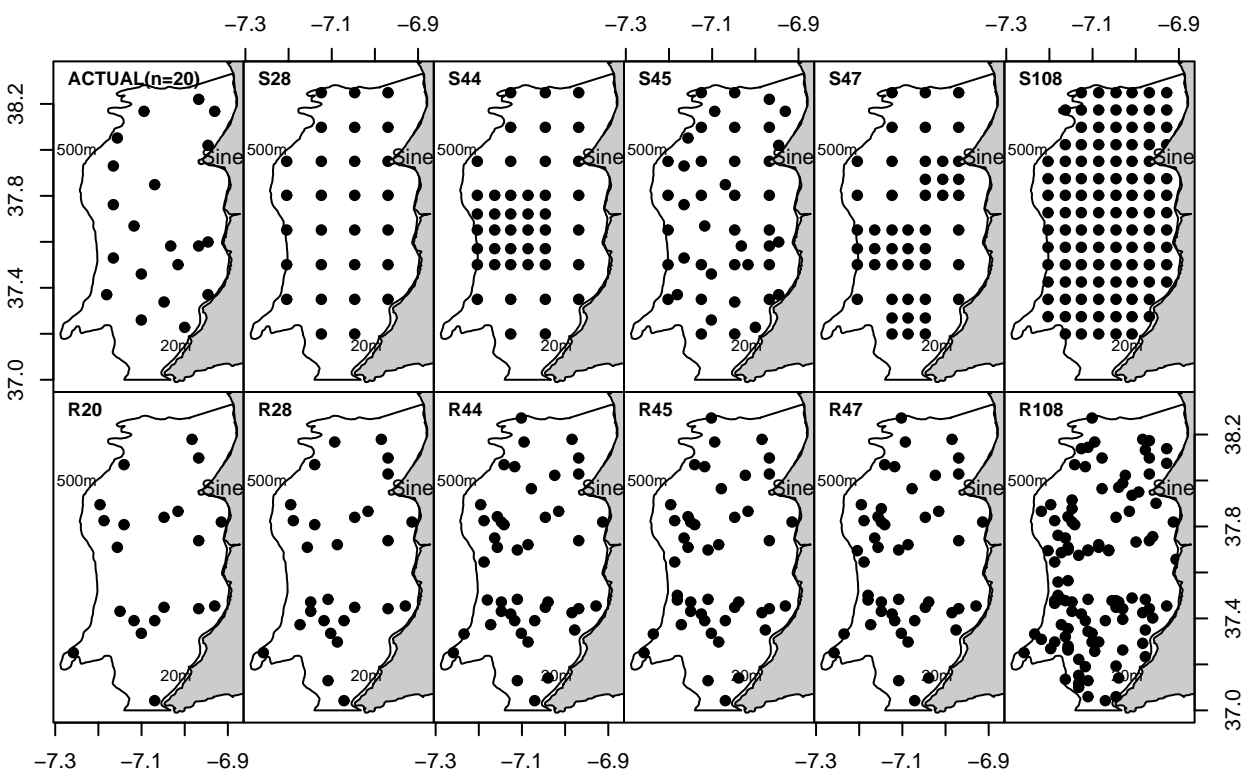




Figure02\_1

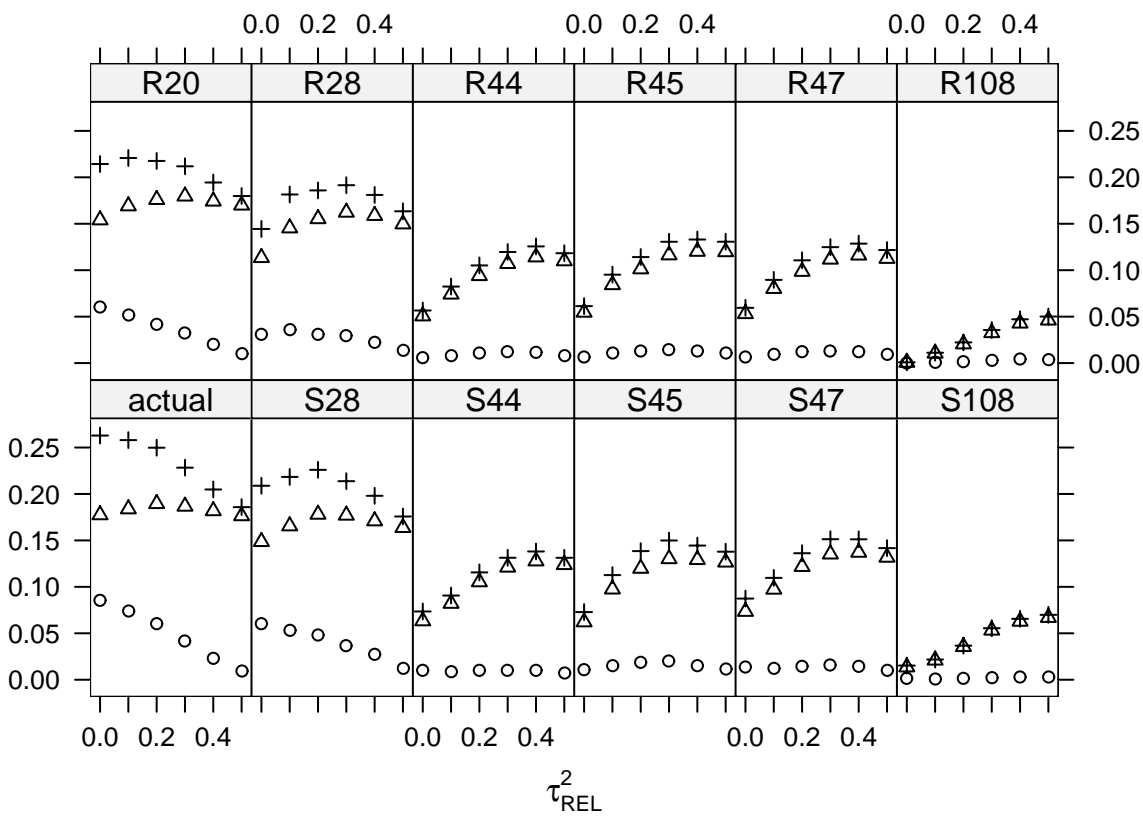


Figure02\_2


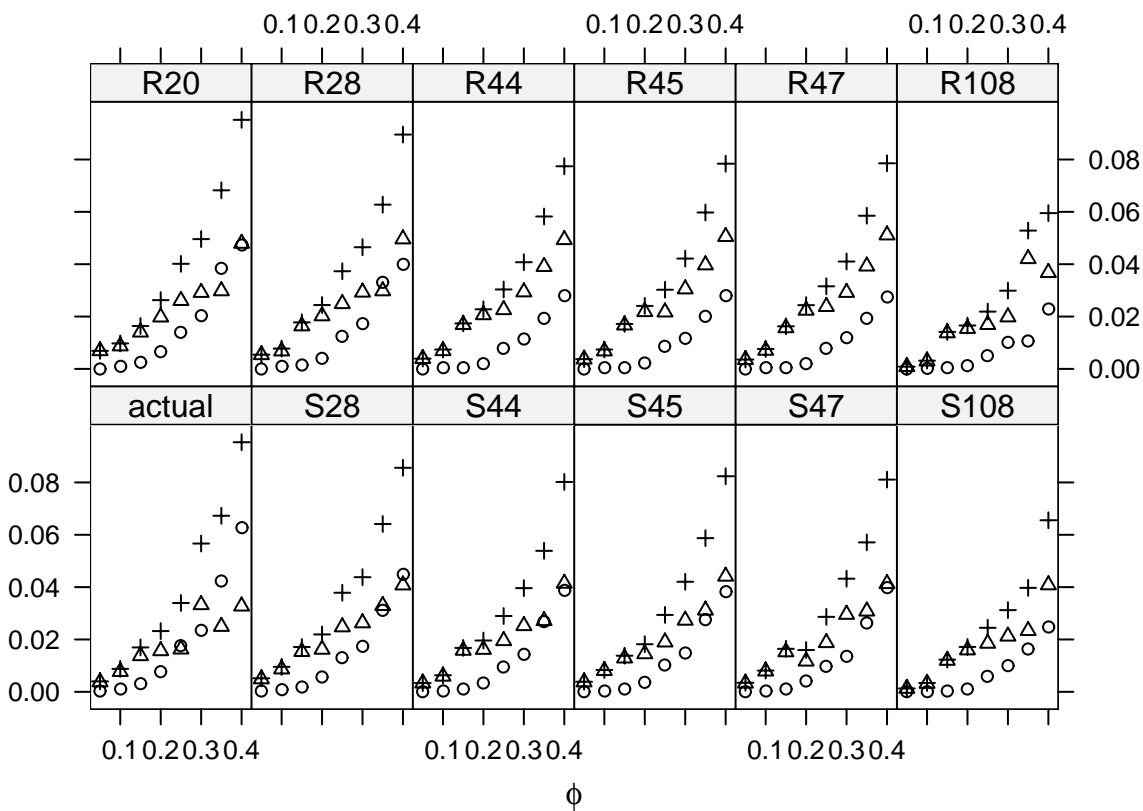


Figure03

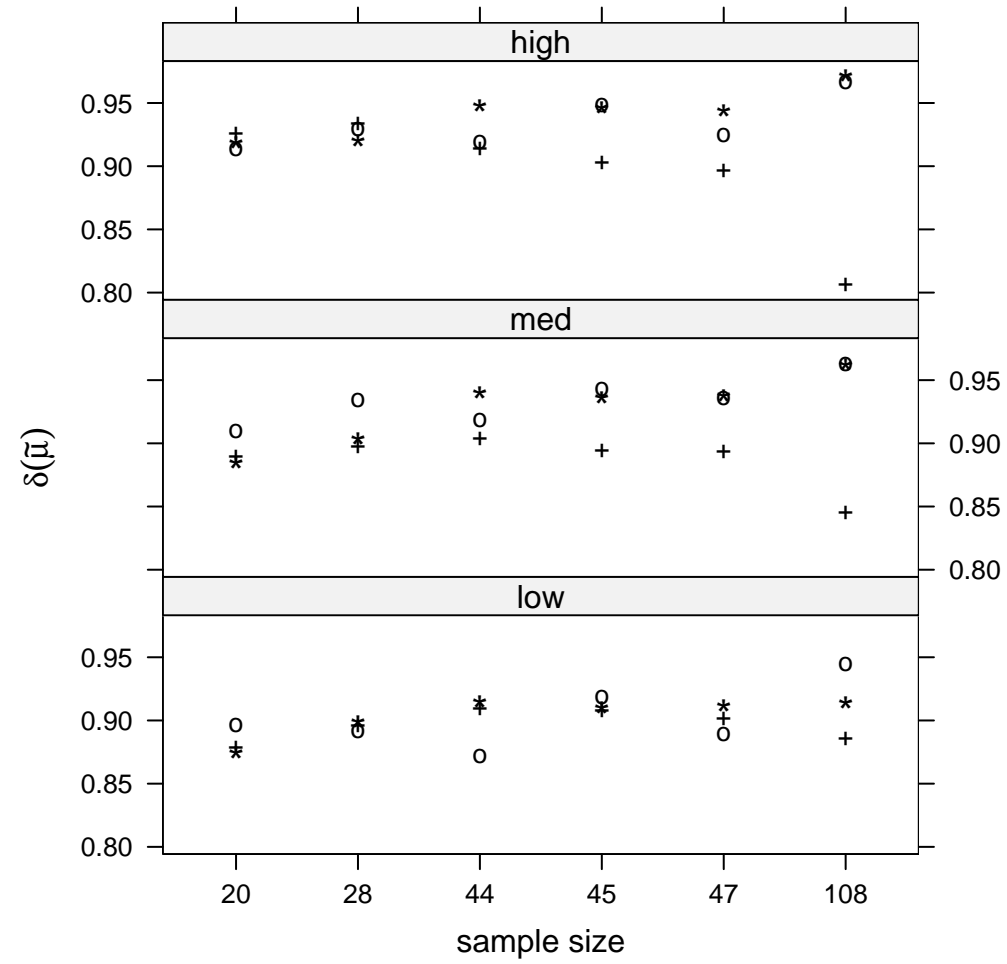

FISH896R1 REVISION NOTES

ERNESTO JARDIM

14/Feb/2007

The revision was carried out to accommodate the Editor's comments about the english. A pdf file with all the corrections made was also uploaded to the system, named "ejpj.ptBTSgeosim.R2diff.pdf".

# Geostatistical Assessment of Sampling Designs for Portuguese Bottom Trawl Surveys

Ernesto Jardim<sup>1</sup> <ernesto@ipimar.pt> and Paulo J. Ribeiro Jr<sup>2</sup> <paulojus@ufpr.br>

14th February 2007

<sup>1</sup>Instituto Nacional de Investigação Agrária e das Pescas, Av. Brasília, 1449-006, Lisboa, Portugal  
Tel: +351 213 027 093

<sup>2</sup>Departamento de Estatística, Universidade Federal do Paraná, C.P. 19.081 CEP: 81.531-990, Curitiba,  
Paraná, Brasil

## Abstract

1  
2 New sampling designs for the Autumn Portuguese bottom trawl survey (ptBTS) were investigated  
3 to explore alternative spatial configurations and possible increments on sample size. The currently  
4 used stratified random design and five proposals of systematic based designs were assessed by a  
5 simulation study, adopting a geostatistical approach based on likelihood methods of inference. The  
6 construction of the designs was based on “*informal*” method to reflect the practical constraints of  
7 bottom trawl surveys. The proposed designs were a regular design with 28 locations (S28), two  
8 regular designs with extra regular added locations with 44 (S44) and 47 (S47) locations, a design  
9 which overlaps the regular and stratified random design currently used with 45 locations (S45) and  
10 an high density regular design with 108 locations (S108), used just as a benchmark. The designs were  
11 assessed by computing bias, relative bias, mean square error and coverages of confidence intervals.  
12 Additionally a variance ratio statistic between each study designs and a corresponding random design  
13 with the same sample size was computed to separate out the effects of different sample sizes and  
14 spatial configurations. The best performance design was S45 with lower variance, higher coverage  
15 for confidence intervals and lower variance ratio. This result can be explained by the fact that this  
16 design combines good parameter estimation properties of the random designs with good prediction  
17 properties of regular designs. In general coverages of confidence intervals ~~were where~~ lower than  
18 the nominal 95% level reflecting an underestimation of variance. Another interesting fact ~~was were~~  
19 the lower coverages of confidence intervals computed by sampling statistics for the random designs,

20 for increasing spatial correlation and sample size. This result illustrates that in the presence of  
21 spatial correlation, sampling statistics will underestimate variances according to the combined effect  
22 of spatial correlation and sampling density.

23 **Key-words:** bottom trawl surveys; geostatistics; simulation; hake; horse mackerel; sampling design.

## 1 Introduction

Fisheries surveys are an essential sampling process for the estimation of ~~the most important sampling process to estimate~~ fish abundance as they provide independent information on the number and weight of fish that exist on a specific area and period. Moreover, this information can be obtained fully disaggregated along several biological dimensions ~~disaggregated by several biological parameters~~ like age, length, maturity status, etc. Like for any other sampling procedures, the quality of the data obtained depends greatly in part on the sampling design applied ~~used to estimate the variables of interest~~.

For the last 20 to 30 years, bottom trawl surveys (BTS) have been carried out in Western European waters using design-based strategies (Anon., 2002, 2003). However, if one assumes that the number of fish in a specific location is positively correlated with the number of fish in nearby locations, then a geostatistical model can be adopted for estimation and prediction and a model-based approach can be considered to define and assess the sampling design. On the other hand geostatistical principles are widely accepted and can be regarded as a natural choice for modelling fish abundance (e.g. see Rivoirard et al., 2000; Anon., 2004).

Thompson (1992) contrasts design-based and model-based approaches considering that under the former one assumes the values of the variable of interest are fixed and the selection probabilities for inference are introduced by the design, whereas under the latter one consider the observed properties of interest as realisations of random variables and carries out inference based on their joint probability distribution. Hansen et al. (1983) points the key difference between the two strategies by stating that design-based inference does not need to assume a model for the population, the random selection of the sample provides the necessary randomisation, while the model-based inference is made on the basis of an assumed model for the population, and the randomisation supplied by nature is considered sufficient. If the model is appropriate for the problem at hand there will be an efficiency gain in inference and prediction with model-based approaches, although model mis-specification can lead us to ~~however a model mis-specification can produce~~ inaccurate conclusions. In our context, and with the ~~with~~ experience accumulated over 20 years of bottom trawl ~~trawls~~ surveys within the study area, a fairly complete picture exists ~~there is a fairly good idea~~ of the characteristics of the fish assemblage in the area, so the ~~population and~~ ~~the~~ risk of assuming an unreasonable model should be small.

Portuguese bottom trawl surveys (ptBTS) have been carried out on the Portuguese continental waters since June 1979 on board the R/V Noruega, twice a year in Summer and Autumn. The main objectives of these surveys are: (i) to estimate indices of abundance and biomass of the most important commercial species; (ii) to describe the spatial distribution of the most important commercial species, (iii) to collect information on individual biological parameters such as maturity, sex-ratio, weight, food habits, etc. - The target species are hake (*Merluccius merluccius*), horse mackerel (*Trachurus trachurus*), mackerel

58 (*Scomber scombrus*), blue whiting (*Micromessistius poutassou*), megrims (*Lepidorhombus boscii* and *L.*  
59 *whiffiagonis*), monkfish (*Lophius budegassa* and *L. piscatorius*) and Norway lobster (*Nephrops norvegi-*  
60 *cus*). A Norwegian Campbell Trawl 1800/96 (NCT) with a codend of 20 mm mesh size, mean vertical  
61 opening of 4.8 m and mean horizontal opening between wings of 15.6 m has been used (Anon., 2002).

62 Between 1979 and 1980, a stratified random sampling design with 15 strata was adopted. Those strata  
63 were set based on ~~designed using~~ depth and geographical areas. In 1981 the number of strata ~~was~~ were  
64 revised to 36. In 1989 the sampling design was reviewed and a new stratification was defined using  
65 12 sectors along the Portuguese continental coast subdivided into 4 depth ranges: 20-100m, 101-200m,  
66 201-500m and 501-750 m, with a total of 48 strata. Due to constraints in the vessel time available  
67 for this survey, the sample size was established to total ~~in~~ 97 locations, which were allocated equally  
68 split to obtain 2 locations in each stratum. The locations' coordinates were selected randomly, albeit  
69 constrained ~~constraint~~ by the historical records of clear tow positions and other information about the  
70 sea floor, thus avoiding places where trawling was not possible ~~the fishery engine was not able to trawl~~.  
71 This sampling plan has been kept fixed since 1989. ~~was kept fixed over the years~~. The tow duration was  
72 set until 2001 ~~as was~~ 60 minutes and was then reduced in 2002 to ~~since 2002 was set in~~ 30 minutes, based  
73 on an experiment that showed no significant differences in the mean abundance and length distribution  
74 between the two tow duration.

75 The main objective of the present work is to investigate ~~investigated~~ proposals of new sampling designs  
76 for the Autumn Portuguese bottom trawl survey (ptBTS). We aim to ~~aimed at~~ explore new spatial  
77 configurations and possible increases on sample size, which could be achieved by e.g. reducing the  
78 hauling time (from 1 hour to 1/2 hour). Secondly, we aim to ~~aimed at~~ describe a pragmatic procedure  
79 to build sampling designs for BTS, develop a statistical approach to compare sampling designs with  
80 different sample sizes and spatial configurations, and provide generalized results that could be used for  
81 other surveys and species. A simulation study was performed to compare the stratified random design  
82 which is currently used against five proposals of systematic based designs, which we have called ~~called~~  
83 ~~the~~ study designs. A model based geostatistical approach (Diggle and Ribeiro, 2006) was adopted using  
84 likelihood based methods of inference and conditional simulations to estimate fish abundance on the  
85 study area.

86 Section 2 describes the framework for the simulation study starting with the model specifications followed  
87 by a ~~the~~ description of the sampling designs and the setup for the simulation study, conducted in five  
88 steps as described in Section 2.3. The results of the simulation study comparing the study designs are  
89 presented in Section 3 and the findings are discussed in Section 4.



## 2 Methods

The survey area considered for this work corresponds to the Southwest of the Portuguese Continental EEZ, between S.Vicente Cape (37.00°lat north) and (between Setubal's Canyon (38.30°lat north). Locations stored using the Mercator projection were and S.Vicent Cape). Before any calculation the mercator projection was transformed into an orthonormal space by converting longitude by the cosine of the mean latitude (Rivoirard et al., 2000). At Portuguese latitude (38-42°)  $1^\circ\text{lat} \approx 60\text{nm}$ . The area has  $\approx 1250\text{nm}^2$  and the maximum distance between two locations was  $\approx 81\text{nm}(1.35^\circ\text{lat})$ .

### 2.1 Geostatistical framework

The spatial model assumed here is a log-Gaussian geostatistical model. This is a particular case of the Box-Cox Gaussian transformed class of models discussed in Christensen et al. (2001). The data consist ~~consists~~ of the pair of vectors  $(x, y)$  with elements  $(x_i, y_i) : i = 1, \dots, n$ , where  $x_i$  denote the coordinates of a spatial location within a study region  $A \subset \mathbb{R}^2$  and  $y_i$  is the measurement of the abundance at this location. Denoting by  $z_i$  the logarithm of this measurement, the Gaussian model for the vector of variables  $Z$  can be written as:

$$Z(x) = S(x) + \varepsilon \tag{1}$$

where  $S(x)$  is a stationary Gaussian process at locations  $x$ , with  $E[S(x)] = \mu$ ,  $Var[S(x)] = \sigma^2$  and an isotropic correlation function  $\rho(h) = Corr[S(x), S(x')]$ , where  $h = \|x - x'\|$  is the Euclidean distance between the locations  $x$  and  $x'$ ; and the terms  $\varepsilon$  are assumed to be mutually independent and identically distributed  $Gau(0, \tau^2)$ . For the correlation function  $\rho(h)$  we adopted the exponential function with algebraic form  $\rho(h) = \exp\{-h/\phi\}$  where  $\phi$  is the correlation range parameter such that  $\rho(h) \simeq 0.05$  when  $h = 3\phi$ . Within the usual geostatistical *jargon* (Isaaks and Srivastava, 1989)  $\tau^2 + \sigma^2$  is the (total) sill,  $\sigma^2$  is the partial sill,  $\tau^2$  is the nugget effect and  $3\phi$  is the practical range.

Hereafter we use the notation  $[\cdot]$  for *the distribution of* the quantity indicated within the brackets. The adopted model defines  $[\log(Y)] \sim \text{MVGau}(\mu\mathbf{1}, \Sigma)$ , i.e  $[Y]$  is multivariate log-Gaussian with covariance matrix  $\Sigma$  parametrised by  $(\sigma^2, \phi, \tau^2)$ . Parameter estimates can be obtained by maximum likelihood (Diggle and Ribeiro, 2006). For spatial prediction consider first the prediction target  $T(x_0) = \exp\{S(x_0)\}$ , i.e. the value of the process in the original measurement scale at a vector of spatial locations  $x_0$ . Typically  $x_0$  defines a grid over the study area. From the properties of the model above the predictive distribution  $[T(x)|Y]$  is log-Gaussian with mean  $\mu_T$  and variance  $\sigma_T^2$  given by:

$$\begin{aligned}\mu_T &= \exp\{\mathbb{E}[S(x_0)] + 0.5 \text{Var}[S(x_0)]\} \\ \sigma_T^2 &= \exp\{2 \mathbb{E}[S(x_0)] + \text{Var}[S(x_0)]\}(\exp\{\text{Var}[S(x_0)]\} - 1)\end{aligned}$$

118 with

$$\begin{aligned}\mathbb{E}[S(x_0)] &= \mu + \Sigma'_0 \Sigma^{-1} (Z - \mathbf{1}\mu) \\ \text{Cov}[S(x_0)] &= \Sigma - \Sigma'_0 \Sigma^{-1} \Sigma_0\end{aligned}$$

119 where  $\Sigma_0$  is a matrix of covariances between the variables at prediction locations  $x_0$  and the data locations  
120  $x$  and  $\text{Var}[S(x_0)]$  ~~are is~~ given by the diagonal elements of  $\text{Cov}[S(x_0)]$ . In practice, we replace the model  
121 parameters in the expressions above by their maximum likelihood estimates.

122 Under the model assumptions,  $[T|Y]$  is multivariate log-Gaussian and inferences about prediction means  
123 and variances, or other properties of interest, can be drawn either analytically or, more generally, through  
124 conditional simulations. Prediction targets can be specified as functionals  $\mathcal{F}(S)$  which are applied to  
125 the conditional simulations. For instance, inferences on the global mean of a particular realisation of  
126 the stochastic process over the area are obtained by defining  $x_0$  as a grid covering the study area at  
127 which conditional simulations of  $[S(x_0)|Y]$  are taken; the simulated values are then exponentiated and  
128 averaged.

## 129 2.2 Sampling designs

130 In general, survey sampling design is about choosing the sample size  $n$  and the sample locations  $x$   
131 from which data  $Y$  can be used to predict any functional of the process. In the case of the ptBTS some  
132 particularities must be taken into account: (i) the survey targets several species which may have different  
133 statistical and spatial behaviours; (ii) for each species several variables are collected (weight, length,  
134 number, etc.) that might be distributed differently due to age and sex-related aggregating behavior;  
135 (iii) the sampling is destructive and replicates can not be obtained; (iv) the variability of observed fish  
136 abundance is typically high, and (v) the planned sampling design may be unattained in practice due to  
137 unpredictable commercial fishing activity at the sampling area, weather conditions or bad sea conditions  
138 ~~and~~ other operational constraints.

139 Optimal designs can be obtained formally, by defining a criteria and finding the set of sampling locations  
140 which minimise ~~minimises~~ some sort of loss function, as e.g. discussed in Diggle and Lophaven (2006).  
141 On the other hand, designs can be defined *informally* by arbitrarily defining locations which present a  
142 compromise ~~compromises~~ between statistical principles and operational constraints. Both are valid for

143 geostatistical inference as described in Section 2.1 provided that the locations  $x$  are fixed and stochas-  
144 tically independent of the observed variable  $Y$ . The above characteristics of the ptBTS ~~make~~ makes it  
145 very complex to set a suitable ~~criterion~~ criteria to define a loss function to be minimized with relation  
146 to ~~survey design~~ the designs. Additionally, ~~vessel cost at sea is mainly day-based and not haul-based,~~  
147 ~~so costs of a ship at sea are mainly day-based and not haul-based and increasing the sample size has~~  
148 ~~to consider~~ groups of locations instead of individual ~~sampling points~~ must be considered when altering  
149 sampling size ~~points~~. Therefore, our approach was to construct the proposed designs informally trying to  
150 accommodate: (i) historical information about hake and horse mackerel abundance distribution (Anon.,  
151 2002; Jardim, 2004), (ii) geostatistical principles about the estimation of correlation parameters (e.g.  
152 see Isaaks and Srivastava, 1989; Cressie, 1993; Muller, 2001) and (iii) operational constraints like known  
153 trawlable grounds and minimum distance between hauls.

154 The *study designs* included the design currently adopted for this survey, named “ACTUAL” with 20  
155 locations, and five systematic based sampling designs. The systematic based designs were defined based  
156 on two possible increments in the sample size: a  $\approx 40\%$  increment, which is expected to be achievable in  
157 practice by reducing haul time from 1 hour to 1/2 hour; and a  $\approx 60\%$  increment, which could be achieved  
158 in practice by adding to the previous increment an allocation of higher sampling density to this area in  
159 order to cover the highest variability of hake recruits historically found within this zone. These designs  
160 are denoted by “S” followed by a number corresponding to the sample size. For the former increment a  
161 regular design named “S28” was proposed and for the latter three designs were proposed: “S45” overlaps  
162 the designs ACTUAL and S28, allowing direct comparison with the previous designs; “S44” and “S47”  
163 are two infill designs (Diggle and Lophaven, 2006) obtained by augmenting S28 with a set of locations  
164 positioned regularly at smaller distances, aiming to better estimate the correlation parameter and, in  
165 particular, the noise-to-signal ratio. S44 was built by defining a single denser sampling zone and S47 by  
166 adding three areas with denser sampling. A sixth design “S108” was defined to be used as reference with  
167 twice the density of S28.

168 The designs proposed differ in both size and spatial configuration and a simple analysis of any statistic  
169 thus obtained would be confounded by ~~statistics would confound~~ these two effects. This situation mo-  
170 tivated the development of a statistical approach to compare designs with different sample sizes and  
171 spatial configurations. We used a *ratio of variances* of the relevant estimators between pairs of study  
172 designs and random designs with the same sample size, isolating in this way the spatial configuration  
173 effect. To carry out this analysis we built six additional designs with the same sample size as the study  
174 designs and with locations randomly chosen within the study area. We denote these by “R” followed by  
175 the number of corresponding locations. Each random design contains all the locations of the previous  
176 one such that the results are comparable without the effect ~~effects~~ of the random allocation of sampling  
177 sites ~~the sampling locations~~.

178 The *study* and corresponding *random* designs are shown in Figure 1.

## 179 2.3 Simulation study

180 The simulation study was carried out in five steps as follows.

181 **Step 1 Define a set of study designs.** The sampling designs described in Section 2.2 are denoted  
182 by  $\Lambda_d : d = 1, \dots, 12$ , with  $d = 1, \dots, 6$  for the study designs and  $d = 7, \dots, 12$  for the  
183 corresponding random designs, respectively.

184 **Step 2 Define a set of correlation parameters.** Based on the analysis of historical data of hake  
185 and horse mackerel spatial distribution and defining  $\tau_{REL}^2 = \tau^2 / (\tau^2 + \sigma^2)$ , a set of model pa-  
186 rameters  $\theta_p : p = 1, \dots, P$  was defined by all combinations of  $\tau_{REL}^2 = \{0, 0.1, 0.2, 0.3, 0.4, 0.5\}$   
187 and  $\phi = \{0.05, 0.1, 0.15, 0.2, 0.25, 0.3, 0.35, 0.4\}^{o}lat$ . The values of  $\sigma^2$  are given by setting  
188  $\sigma^2 + \tau^2 = 1$ .

189 **Step 3 Simulate data.** For each parameter set  $\theta_p$  we obtained S=200 simulations  $Y_{ps} : s = 1, \dots, S$   
190 from  $[Y]$  on a regular grid of 8781 locations under the model described in Section 2.1. Each  
191 simulation  $Y_{ps}$  approximates a possible realisation of the process within the study area from  
192 which we computed the mean value  $\mu_{ps}$ . For each  $Y_{ps}$  we extracted the data  $Y_{pds}$  at the  
193 locations of the sampling designs  $\Lambda_d$ .

194 **Step 4 Estimate correlation parameters.** For each  $Y_{pds}$  obtain maximum likelihood estimates  
195 (MLE's)  $\tilde{\theta}_{pds}$  of the model parameter.

196 **Step 5 Simulating from the predictive distribution.** A prediction grid  $x_0$  with 1105 locations  
197 and the estimates  $\tilde{\theta}_{psd}$  were used to obtain C=150 simulations  $\tilde{Y}_{pdsc} : c = 1, \dots, C$  of the  
198 conditional distribution  $[T(x_0)|Y]$  which were averaged to produce  $\bar{Y}_{pdsc}$ .

## 199 2.4 Analysis of simulation results

200 The simulation study requires maximum likelihood estimates for the model parameters which are ob-  
201 tained numerically. Therefore a set of summary statistics was computed in order to check the [results'](#)  
202 [consistency](#)~~consistency of the results~~. We have recorded rates of non-convergence of the minimization  
203 algorithm; estimates which coincided with the limiting values imposed to the minimization algorithm  
204 ( $\phi = 3$  and  $\tau_{REL}^2 = 0.91$ ); absence of spatial correlation ( $\phi = 0$ ) and values of the parameter estimates  
205 which are considered atypical for the problem at hand ( $\phi > 0.7$  and  $\tau_{REL}^2 > 0.67$ ).

206 The 48 [parameter sets](#) ~~parameters set~~ ( $\theta_p$ ), 12 sampling designs ( $\Lambda_d$ ), 200 data simulations ( $Y_{psd}$ ) and  
207 150 conditional simulations ( $\tilde{Y}_{pdsc}$ ) produced 17.28 million estimates of abundance ~~which were used to~~

208 ~~compare the designs~~. For each design we have computed the estimator  $\tilde{\mu}_{psd} = C^{-1} \sum_c \bar{Y}_{pdsc}$  of mean  
 209 abundance  $\mu_{ps}$  which has variance  $\text{Var}(\tilde{\mu}_{psd}) = \bar{\rho}_{AA} + \sum_i^n \sum_j^n w_i w_j \tilde{\rho}_{ij} - 2 \sum_i^n w_i \bar{\rho}_{iA}$ , where  $\bar{\rho}_{AA}$  is  
 210 the mean covariance within the area, estimated by the average covariance between the prediction grid  
 211 locations ( $x_0$ );  $w$  are kriging weights;  $\tilde{\rho}_{ij}$  is the covariance between a pair of data locations; and  $\bar{\rho}_{iA}$  is  
 212 the average covariance between each data locations and the area discretized by the prediction grid  $x_0$   
 213 (Isaaks and Srivastava, 1989).

214 We used bias, relative bias, mean square error (MSE), confidence intervals coverage and ratio of variances  
 215 to assess the simulation results, comparing the estimates of ~~the~~ abundance provided by the different study  
 216 designs. For each design these statistics were averaged over all the simulations ( $s$ ) and parameter sets  
 217 ( $p$ ) or groups of parameters sets. Considering the difference between the abundance estimates  $\tilde{\mu}_{psd}$  and  
 218 simulated means  $\mu_{ps}$ , bias was computed by the difference, relative bias was computed by the difference  
 219 over the estimate  $\tilde{\mu}_{ps}$  and MSE was computed by the mean square of the difference. For each estimate  
 220  $\tilde{\mu}_{psd}$  a 95% confidence interval for  $\mu_{ps}$ , given by  $\text{CI}(\tilde{\mu}_{psd}) = \tilde{\mu}_{psd} \pm 1.96 \sqrt{\text{Var}(\tilde{\mu}_{psd})}$ , was constructed  
 221 and the coverage of the confidence intervals  $\delta$  were computed as by the proportion of the intervals which  
 222 contained the value of  $\mu_{ps}$  over all the simulations. This statistic was introduced to help assessing the  
 223 quality of the variance estimates. Next ~~At least~~, we called *ratio of variances* a statistic  $\xi$  obtained by  
 224 dividing the variance  $\text{Var}(\tilde{\mu}_{psd})$  of each study design by the random design with the same size. Notice  
 225 that the single difference among each pair of designs with the same size was the spatial configuration  
 226 of the locations and  $\xi$  isolated this effect. Finally we used the results from the six random designs to  
 227 contrast sampling design based and geostatistical based estimates.

228 All the analysis were performed using with the R software (R Development Core Team, 2005) and the  
 229 add-on packages geoR (Ribeiro Jr. and Diggle, 2001) and RandomFields (Schlather, 2001).

### 230 3 Results

231 Table 1 summarises the analysis of historical data showing parameter estimates for a sequence of years.  
 232 This aims to gather information on reasonable values for the model parameters. Notice that units for  $\phi$   
 233 are given in degrees and, for the adopted exponential correlation model, the practical range in nautical  
 234 miles ( $r$ ) is given by  $3\phi$  ~~and also included in the table~~. The values of  $\tau_{REL}^2 = 1$  estimated in some years  
 235 indicate ~~indicates~~ an uncorrelated spatial process and for such cases estimates of  $\phi$  equals to zero. For  
 236 most ~~of the~~ cases  $\tau_{REL}^2$  was estimated as zero due to the lack of nearby locations in the sampling plan  
 237 and the behaviour of the exponential correlation function at short distances. Given that there is no  
 238 information in the data about the spatial correlation at distances smaller than the smallest separation  
 239 distance between a pair of location, this parameter can not be estimated properly and the results depend

240 on the behaviour of the correlation function near the origin.

241 Table 2 ~~presents present~~ results used for checking the reliability of the parameter estimates ~~and the~~  
242 ~~possible impact on once this could have an impact on the~~ prediction results. The highest rate of lack  
243 of convergence was 0.6% for ~~the~~ designs ACTUAL and R20. Estimates of  $\phi$  ~~constraint by equals to~~ the  
244 upper limit imposed to the algorithm were, in the worst case, 0.9% for R28 and R47 ~~while and~~ for  $\tau_{REL}^2$   
245 it was 1.2% for R28. In general there was a ~~slightly slight~~ worst performance of the random designs  
246 but this is irrelevant for the objectives of this study. The above simulations were not considered for  
247 subsequent analysis. Lack or weak spatial correlation given by  $\phi = 0$  and/or  $\tau_{REL}^2 > 0.67$  were found  
248 in about 35% of the simulations for the designs with fewer number of locations. ~~This , and this~~ rate  
249 decreases as the sample size increases ~~, down to below 10% for the largest designs.~~ For both statistics  
250 the study designs showed slightly higher values than the corresponding random designs. Identification of  
251 weakly correlated spatial processes in part of the simulations was indeed expected to occur given the low  
252 values of  $\phi$  (0.05 and 0.1) and high values of  $\tau_{REL}^2$  (0.5) used in the simulations. The number of cases  
253 that presented  $\phi > 0.7$  were slightly higher for random designs, with a maximum of 2.6% for R44 and  
254 R45, but were considered to be within an acceptable range given the high variability of the estimator.  
255 Our overall conclusion was that the estimation procedure and algorithms produced parameter estimates  
256 which can be trusted for subsequent analysis.

257 Figure 2 shows square bias, variance and MSE obtained from the estimates of correlation parameters  $\phi$   
258 and  $\tau_{REL}^2$ . For  $\tau_{REL}^2$  the majority of the designs presented similar patterns with a small contribution of  
259 bias to the MSE and increasing values of MSE for higher ~~true~~ parameter values. The designs ACTUAL,  
260 S28 and R20 behaved differently with higher values of bias at low values of  $\tau_{REL}^2$  that pushed MSE  
261 to higher values. As an effect of the sample sizes, the absolute values of MSE ~~define defines~~ 3 groups  
262 composed by designs with 20 and 28 locations, designs with 44, 45 and 47 locations, and designs with 108  
263 locations; with decreasing values of MSE among them, respectively. MSE increases with the increase of  
264 the true value of  $\phi$  and its absolute value decreases slightly with the increasing sample sizes. All designs  
265 presented a similar pattern with the variance contributing more than bias to the MSE. The study designs  
266 showed a slightly higher relative contribution of the variance to MSE compared with the random designs.

267 Table 3 shows geostatistical abundance estimates ( $\tilde{\mu}$ ) and their bias, relative bias, variance, MSE and  
268 95% confidence interval coverage for both sets of designs. Additionally the table also shows ~~design-based~~  
269 ~~statistics statistics based on sampling theory obtained~~ for random designs. For subsequent analysis  
270 the designs S108 and R108 were regarded just as benchmarks since they are unrealistic for practical  
271 implementation. Bias ~~was were~~ quite small in all situations and can be considered negligible; ~~the highest~~  
272 ~~relative bias value was with higher relative bias of~~ 0.014 for S28. All random designs showed a negative  
273 bias whereas all study designs showed a positive one. Variances estimated by study designs were lower

274 than the ones for the corresponding random designs. For random designs the variance decays with  
275 increasing sample sizes, whereas study designs behaved differently with S45 presenting the lowest variance  
276 followed by S47, S44, S28 and S20. MSE showed the same pattern since bias ~~was~~ were small, supporting  
277 our claim that bias ~~is~~ were not relevant for the purpose of this work. The coverages of confidence intervals  
278 ( $\delta$ ) were lower than the nominal level of 95% ~~except~~ ~~excepted~~ for S108 and R108, reflecting a possible  
279 underestimation of an underestimation of the variance. Considering the designs individually it can be  
280 seen that underestimation using ACTUAL, S28 and S45 was actually lower than with ~~showed a lower~~  
281 ~~underestimation than~~ the equivalent random designs. To better investigate this, Figure 3 presents values  
282 of  $\delta$  splitted by three levels of correlation (low={0.05, 0.1}, med={0.15, 0.20, 0.25}, high={0.3, 0.35,  
283 0.4}). The estimates of ~~For geostatistical estimates the coverages~~  $\delta$  with geostatistical methods increased  
284 with higher correlation levels ~~increases with higher true values of  $\phi$~~  and larger sample sizes, whereas with  
285 sampling statistics there is a decrease in ~~sampling statistics showed a different pattern, with maximum~~  
286 ~~values for R44 for low and medium correlation levels and for R28 for high correlation levels. This~~  
287 ~~behaviour is more noticeable for stronger spatial correlation, in particular, the largest designs showed~~  
288 ~~lower~~ confidence interval coverage with higher levels of correlation and larger sample sizes, reflecting  
289 ~~pointing for~~ a more pronounced underestimation of ~~the~~ variance.

290 Logarithms of the variance ratios between corresponding “S” and “R” designs are presented in Table 3.  
291 Without considering S108 for the reasons stated before, the best result was found for S45 (-0.208)  
292 and the worst for S28 (-0.108). This must be balanced by the fact that S45 showed a lower variance  
293 underestimation than R45, with the opposite happening for S44/R44 and S47/R47, so, in reality, the  
294 value of  $\xi$  is smaller for S45 than for S44 and S47.

## 295 4 Discussion

296 The choice of sampling designs for BTS is subject to several practical constraints and this has motivated  
297 the adoption of *informally* defined designs which accommodated several sources of information like fishing  
298 grounds, haul duration, previous knowledge of the spatial distribution of hake and horse mackerel, among  
299 others, ~~which~~ which could not be incorporated into a design criteria in an objective way. The fact that this can  
300 generate designs with different sample sizes is a drawback of this approach. However, implementation  
301 of systematic designs on irregular spatial domains is likely to provide ~~implementing a systematic design~~  
302 ~~on an irregular spatial domain is also to provide designs with~~ different sample sizes, depending on the  
303 starting location. On the other hand, ~~costs~~ costs of hauling are relatively small when compared with the fixed  
304 costs associated with a vessel’s working day and increasing sample sizes for a BTS should ~~must~~ consider  
305 sets of locations which can be sampled in one working day. For these reasons the different sample sizes  
306 of each design are not just a feature of the adopted approach but also a result of the BTS particularities.

307 The confounding effects of sample size and spatial configuration of the proposed designs jeopardized the  
308 comparison of their ability in estimating ~~the~~ abundance. To overcome this limitation a methodology to  
309 compare designs with different sample sizes and spatial configurations was required. To deal with this  
310 issue we have ~~’ve~~ introduced a mean abundance variance ratio statistic, between the study designs and  
311 a ~~corresponding~~ simulated random design with the same sample size.

312 Spatial analysis in fisheries science is mostly concerned with: (i) ~~In fisheries science the main objective for~~  
313 ~~the spatial analysis usually lies in~~ predicting the distribution of the marine resource, aiming, for instance,  
314 to define areas of high abundance of a given age, sex or maturity status, for the purpose of protection;  
315 ~~and (ii) marine protected areas and~~ to compute abundance indices for stock assessment models (Anon.,  
316 2004). For such situations the model parameters are not the object of focus of the study, but just a  
317 device to better predict ~~the~~ abundance. Muller (2001) points out that the optimality of spatial sampling  
318 designs depends on the given objectives, showing that ideal designs to estimate covariance parameters  
319 of the stochastic process are not the same that would best ~~to~~ predict the value of the stochastic process  
320 in a specific location and/or ~~to~~ estimate global abundance. We have not compared the various study  
321 designs with respect to their estimates ~~the estimation~~ of the covariance parameters ~~as provided that~~ our  
322 main concern was spatial prediction of abundance.

323 The choice of the parameter estimation method was a relevant issue in the context of this work. The  
324 absence of a formal criteria to identify the “best” design naturally led to the use of geostatistical simula-  
325 tions to compare the proposed designs. To carry out a simulation study it is useful to have an objective  
326 method capable of producing single estimates of the model parameters. Within traditional geostatistical  
327 methods (Isaaks and Srivastava, 1989; Cressie, 1993; Goovaerts, 1997; Rivoirard et al., 2000) estimation  
328 usually involves the subjective intervention of the analyst ~~the estimation entangles subjective analyst’s~~  
329 ~~intervention~~ to define some empirical variogram parameters such as lag interval, lag tolerance and an  
330 estimator for the empirical variogram. Likelihood based inference produces estimates of the covariance  
331 parameters without a subjective intervention of the data analyst, allowing for automatization of the  
332 estimation process, which makes it is suitable for simulation studies. For this ~~the current~~ work we have  
333 also tested other model fitting ~~used other~~ methods such as restricted maximum likelihood (REML) and  
334 weighted least squares, but they have produced worse rates of convergence in the simulation study. In  
335 particular REML was highly unstable ~~the REML presented an high instability~~ with a high frequency  
336 of atypical results for  $\phi$ . An aspect of parameter estimation for geostatistical models which is high-  
337 lighted when using likelihood based methods concerns ~~is regarded to~~ parameter identification due to  
338 over-parametrized or poorly identifiable models (see e.g. Zhang, 2004). To avoid over-parametrization  
339 we used ~~over parametrization we used a~~ log-transformation, and the process was considered isotropic,  
340 avoiding the inclusion of three parameters on the model: the box-cox transformation parameter (Box and  
341 Cox, 1964) and the two anisotropy parameters, angle and ratio. The choice of the log transformation



342 was supported by the analysis of historical data and does not impact the comparison of the designs,  
343 given that the relative performance of each design will not be affected by the transformation. A point  
344 of concern with the log transformation was the existence of zero values which, in the analysis of the  
345 historical data, were treated as measurement error and included in the analysis ~~with a translation of~~  
346 ~~the observed values,~~ by adding a small amount to all observations. However, it must be noted this is  
347 not always recommended and, in particular, if the stock is concentrated on small schools that cause  
348 discontinuities on the spatial distribution, these transformations will not produce satisfactory results.  
349 Concerning anisotropy, a complete simulation procedure was carried out considering a fixed anisotropy  
350 angle on the north-south direction and an anisotropy ratio of 1, 1.5 or 2. As expected, the absolute values  
351 obtained were different but the overall relative performance was the same, supporting our decision to  
352 report results only for the isotropic model.

353 A major motivation for performing a simulation study was the possibility to use a wide range of covariance  
354 parameters that reflect different spatial behaviours. We used to define the range of the parameters  
355 for simulation, two species with different aggregation patterns, hake and horse mackerel; ~~;~~ the first  
356 an ubiquitous species not usually found in dense aggregations, the second a schooling species. The  
357 similarities found suggest that these results ~~and the last a more scholastic species, to define the range~~  
358 ~~of the parameters for simulation; suggesting results that~~ can be extended to other species with spatial  
359 behavior for species with behaviour compatible with the covariance parameters used here.

360 From a space-time modeling perspective, one of the most interesting analysis for fisheries science is the  
361 fluctuation of the stochastic process over time contrasted with the specific realization in a particular time.  
362 Therefore the comparison of individual results with the mean of the realisations ( $\mu_{ps}$ ) was considered  
363 more relevant than then to the mean of the underlying process ( $\mu$ ) for the computation of bias and  
364 variability. The results showed higher bias for study designs when compared with random designs, but  
365 in both cases showing low values which were considered negligible for the purposes of this work. ~~This~~  
366 ~~conclusion was also supported by the fact that MSE showed a similar relative behaviour as variance.~~

367 Apart from ~~the~~ design S108, which was introduced as a benchmark and not suitable for implementation,  
368 the design that performed better was S45, which presented ~~with~~ lower variance, confidence interval  
369 coverages ~~coverage~~ closer to the nominal level of 95% and lower variance ratio (Table 3). One possible  
370 reason is the balance between good estimation properties given by the random locations and good  
371 predictive properties given by the systematic locations, however the complexity of the BTS objectives  
372 makes it impossible to find a full explanation for this results. A possible indicator of the predictive  
373 properties is the average distance between the designs and the prediction grid locations, which reflects  
374 the extrapolation needed to predict over a grid. We found that S45 had an average of 2.61nm whereas  
375 for S47 the value is 2.72nm, explaining in part the S45 performance. These results are in agreement with

376 Diggle and Lophaven (2006) who showed that *lattice plus closed pairs* designs (similar to S45) performed  
377 better than *lattice plus in-fill* designs (similar to S44 and S47) for accurate prediction of the underlying  
378 spatial phenomenon. The combination of random and systematic designs like S45 is seldom considered  
379 in practice and we are not aware of recommendations of such designs for BTS.

380 It was interesting to notice that most designs presented a coverage of confidence intervals below the  
381 nominal level of 95% ~~indicating that revealing the~~ variances were underestimated. It was not fully clear  
382 how to use such results to correct variance estimation and further investigation is needed on the subject.  
383 Care must be taken when looking at variance ratios since underestimated denominators will produce  
384 higher ratios which can mask the results. This was the case of S45 when ~~compared comparing~~ to S47  
385 and S44, ~~thus~~ supporting our conclusions about S45.

386 Another result of our work was the assessment of abundance estimates from random designs by sampling  
387 statistics, the most common procedure for fisheries surveys (Anon., 2004), under the presence of spatial  
388 correlation. In such conditions an increase in sample size may not provide a proportional increase in  
389 the quantity of information due to the partial redundancy of information under spatial correlation. Re-  
390 sults obtained for coverages of confidence intervals illustrated this (Table 3 and Figure 3), with smaller  
391 coverages for larger sample sizes and higher spatial correlation. In our opinion this is due to an overesti-  
392 mation of the degrees of freedom that lead to an underestimation of prediction standart errors producing  
393 the smaller coverages. These findings support claims to consider geostatistical methods to estimate  
394 fish abundance ~~so, such~~ that correlation between locations is explicitly considered in the analysis, ~~and~~  
395 ~~highlighting the importance of verifying the assumptions behind sampling theory before computing the~~  
396 ~~uncertainty of abundance estimates.~~

## 397 5 Acknowledgements

398 The authors would like to thank the scientific teams ~~involved evolved~~ in the Portuguese Bottom Trawl  
399 Surveys, in particular the coordinator Fátima Cardador. ~~We also thank, and the~~ comments by Manuela  
400 Azevedo ~~and Iago Mosqueira~~. This work was carried out within the IPIMAR's project NeOMAv (QCA-  
401 3/MARE-FEDER, <http://ipimar-iniap.ipimar.pt/neomav>) and was co-financed by project POCTI/MATH/44082/2002.

## 402 References

403 Anon., 2002. Report of the International Bottom Trawl Survey Working Group. Tech. rep., International  
404 Council for the Exploitation of the Sea (ICES), ICES CM 2002/D:03.

- 405 Anon., 2003. Report of the International Bottom Trawl Survey Working Group. Tech. rep., International  
406 Council for the Exploitation of the Sea (ICES), ICES CM 2003/D:05.
- 407 Anon., 2004. Report of the Workshop on Survey Design and Data Analysis. Tech. rep., International  
408 Council for the Exploitation of the Sea (ICES), ICES CM 2004/B:07.
- 409 Box, G., Cox, D., 1964. An Analysis of Transformations. *Journal of the Royal Statistical Society Series*  
410 *B* 26, 211–243.
- 411 Christensen, O., Diggle, P., Ribeiro Jr, P., 2001. Analysing positive-valued spatial data: the transformed  
412 gaussian model. In: Monestiez, P., Allard, D., Froidevaux (Eds.), *GeoENV III - Geostatistics for*  
413 *Environmental Applications*. Vol. 11 of *Quantitative Geology and Geostatistics*. Kluwer, pp. 287–298.
- 414 Cressie, N., 1993. *Statistics for spatial data - Revised Edition*. John Wiley and Sons, New York.
- 415 Diggle, P., Ribeiro, P., 2006. *Model-based Geostatistics*. Springer, New York, in press.
- 416 Diggle, P. J., Lophaven, S., 2006. Bayesian geostatistical design. *Scandinavian Journal of Statistics* 33,  
417 55–64.
- 418 Goovaerts, P., 1997. *Geostatistics for Natural Resources Evaluation*. Oxford University Press, New York.
- 419 Hansen, M., Madow, W., Tepping, B., 1983. An Evaluation of Model-Dependent and Probability-  
420 Sampling Inferences in Sample Surveys. *Journal of the American Statistical Association* 78 (384),  
421 776–793.
- 422 Isaaks, E., Srivastava, M., 1989. *An Introduction to Applied Geostatistics*. Oxford University Press, New  
423 York.
- 424 Jardim, E., 2004. Visualizing hake recruitment - a non-stationary process. In: Sanchez-Vila, X., Carrera,  
425 J., Gómez-Hernández, J. J. (Eds.), *geoENV IV - Geostatistics for Environmental Applications*. Vol. 13  
426 of *Quantitative Geology and Geostatistics*. Kluwer Academic Publishers, London, pp. 508–509.
- 427 Muller, W., 2001. *Collecting Spatial Data - Optimum Design of Experiments for Random Fields*, 2nd  
428 Edition. *Contributions to statistics*. Physica-Verlag, Heidelberg.
- 429 R Development Core Team, 2005. *R: A language and environment for statistical computing*. R Foundation  
430 for Statistical Computing, Vienna, Austria, ISBN 3-900051-07-0.  
431 URL <http://www.R-project.org>
- 432 Ribeiro Jr., P., Diggle, P., June 2001. *geoR: a package from geostatistical analysis*. *R-NEWS* 1 (2), 15–18.  
433 URL <http://cran.R-project.org/doc/Rnews>

- 434 Rivoirard, J., Simmonds, J., Foote, K., Fernandes, P., Bez, N., 2000. Geostatistics for Estimating Fish  
435 Abundance. Blackwell Science, London, England.
- 436 Schlather, M., June 2001. Simulation and analysis of random fields. R News 1 (2), 18–20.  
437 URL <http://CRAN.R-project.org/doc/Rnews/>
- 438 Thompson, S., 1992. Sampling. Statistics. John Wiley & Sons, INC, New York.
- 439 Zhang, H., 2004. Inconsistent estimation and asymptotically equal interpolations in model-based geo-  
440 statistics. Journal of the American Statistical Association 99 (465), 250 – 261.

Table 1: Exponential covariance function parameters ( $\phi, \tau_{\text{REL}}^2$ ) and the geostatistical range (r) estimated yearly (1990-2004) for hake and horse mackerel abundance. The values of  $\phi$  are presented in degrees of latitude and range in nautical miles. The maximum distance between pairs of locations was 63nm.

	Hake			Horse mackerel		
	$\phi(^{\circ}\text{lat})$	r(nm)	$\tau_{\text{REL}}^2$	$\phi(^{\circ}\text{lat})$	r(nm)	$\tau_{\text{REL}}^2$
1990	0.05	9.1	0.01	0.42	76.4	0.00
1991	0.14	24.4	0.63	0.49	88.9	0.43
1992	0.00	0.0	1.00	0.22	39.3	0.05
1993	0.05	9.3	0.00	0.00	0.0	1.00
1995	0.05	8.8	0.00	0.08	14.4	0.00
1997	0.14	24.8	0.00	0.21	38.6	0.42
1998	0.02	3.4	0.00	0.09	16.5	0.00
1999	0.10	17.8	0.00	0.09	16.0	0.00
2000	0.03	4.6	0.00	0.16	29.5	0.00
2001	0.07	12.9	0.00	0.42	75.7	0.06
2002	0.00	0.0	1.00	0.05	8.9	0.00
2003	0.33	59.0	0.00	0.34	62.0	0.00
2004	0.09	15.4	0.00	0.09	17.0	0.00

Table 2: ~~Statistics to provide simulation~~ quality assessment ~~statistics~~ (in percentages) for both design sets and all sample sizes: non-convergence of the minimization algorithm (non-conv); cases truncated by the limits imposed to the minimization algorithm ( $\phi = 3$  and  $\tau_{\text{REL}}^2 = 0.91$ ); uncorrelated cases ( $\phi = 0$ ); and atypical values of the correlation parameters ( $\phi > 0.7$  and  $\tau_{\text{REL}}^2 > 0.67$ ).

statistic	design	sample size					
		20	28	44	45	47	108
non-conv	study	0.6	0.5	0.2	0.2	0.2	0.1
	random	0.6	0.4	0.2	0.2	0.2	0.1
$\phi = 3$	study	0.7	0.5	0.7	0.7	0.5	0.2
	random	0.6	0.9	0.8	0.8	0.9	0.1
$\tau_{\text{REL}}^2 = 0.91$	study	0.7	0.7	1.0	0.9	0.8	0.4
	random	0.8	1.2	1.1	1.1	1.1	0.2
$\phi = 0$	study	36.3	33.0	20.7	20.6	18.0	5.3
	random	32.8	28.5	18.1	17.2	16.2	3.3
$\phi > 0.7$	study	1.3	1.6	1.9	1.9	1.8	1.4
	random	1.8	2.2	2.6	2.6	2.4	1.7
$\tau_{\text{REL}}^2 > 0.67$	study	38.5	35.8	24.2	24.7	21.8	10.0
	random	35.0	31.6	22.1	21.1	20.3	7.6

Table 3: Summary statistics per sets of sampling designs and sample size. Geostatistical abundance estimates ( $\tilde{\mu}$ ) in kg/hour, bias ( $\text{bias}(\tilde{\mu})$ ), relative bias ( $\text{bias}_r(\tilde{\mu})$ ), variance ( $\text{var}(\tilde{\mu})$ ), mean square error (MSE) and 95% confidence interval coverage ( $\delta(\tilde{\mu})$ ). Mean log variance ratios per sampling design type ( $\xi$ ) measures the relative log effect of the systematic based designs configuration with relation to the random designs. The last six rows present the same statistics estimated for random designs by sampling statistics.

method	statistic	design	number of locations					
			20	28	44	45	47	108
geostatistics	$\tilde{\mu}$	study	1.658	1.662	1.649	1.657	1.651	1.641
		random	1.631	1.624	1.625	1.624	1.625	1.625
	$\text{bias}(\tilde{\mu})$	study	0.025	0.030	0.016	0.026	0.019	0.008
		random	-0.001	-0.008	-0.007	-0.009	-0.008	-0.007
	$\text{bias}_r(\tilde{\mu})$	study	0.012	0.014	0.003	0.012	0.005	0.001
		random	-0.004	-0.008	-0.005	-0.006	-0.005	-0.005
	$\text{var}(\tilde{\mu})$	study	0.136	0.108	0.092	0.086	0.089	0.081
		random	0.168	0.129	0.113	0.112	0.112	0.097
	$\text{MSE}(\tilde{\mu})$	study	0.272	0.196	0.164	0.144	0.154	0.104
		random	0.321	0.230	0.173	0.171	0.171	0.124
	$\delta(\tilde{\mu})$	study	0.908	0.922	0.907	0.939	0.920	0.960
		random	0.895	0.909	0.937	0.934	0.934	0.954
	$\xi$	stu/rnd	-0.128	-0.107	-0.150	-0.208	-0.179	-0.228
	sampling statistics	$\bar{Y}$	random	1.615	1.619	1.618	1.616	1.618
$\text{bias}(\bar{Y})$		random	-0.017	-0.014	-0.014	-0.017	-0.015	-0.010
$\text{bias}_r(\bar{Y})$		random	-0.017	-0.014	-0.013	-0.014	-0.014	-0.006
$\text{var}(\bar{Y})$		random	0.197	0.146	0.091	0.088	0.085	0.037
$\text{MSE}(\tilde{\mu})$		random	4.133	4.238	4.109	4.083	4.090	4.073
$\delta(\bar{Y})$		random	0.900	0.910	0.908	0.900	0.896	0.840

Figure 1: Sampling designs and the study area (southwest of Portugal). Each plot shows the sample locations, the bathymetric isoline of 500m and 20m and the coast line. The sampling design name is presented on the top left corner of the plots. The top row shows the *study* designs and the bottom row the random designs.

Figure 2: Summary statistics for the covariance parameters estimation by sampling design as a function of the true parameter values.  $\text{bias}^2$  ( $\circ$ ), variance ( $\Delta$ ) and mean square error ( $+$ ). Top figure presents  $\tau_{\text{REL}}^2$  results and bottom figure  $\phi$ .

Figure 3: Coverage of the confidence intervals ( $\delta$ ) for different  $\phi$  levels (low =  $\{0.05, 0.1\}$ , med $\{0.15, 0.20, 0.25\}$  high =  $\{0.30, 0.35, 0.40\}$ ) for estimates of abundance by sampling statistics for the random designs ( $+$ ) and by geostatistics for the study ( $\circ$ ) and random designs ( $*$ ).



FIGURE 01

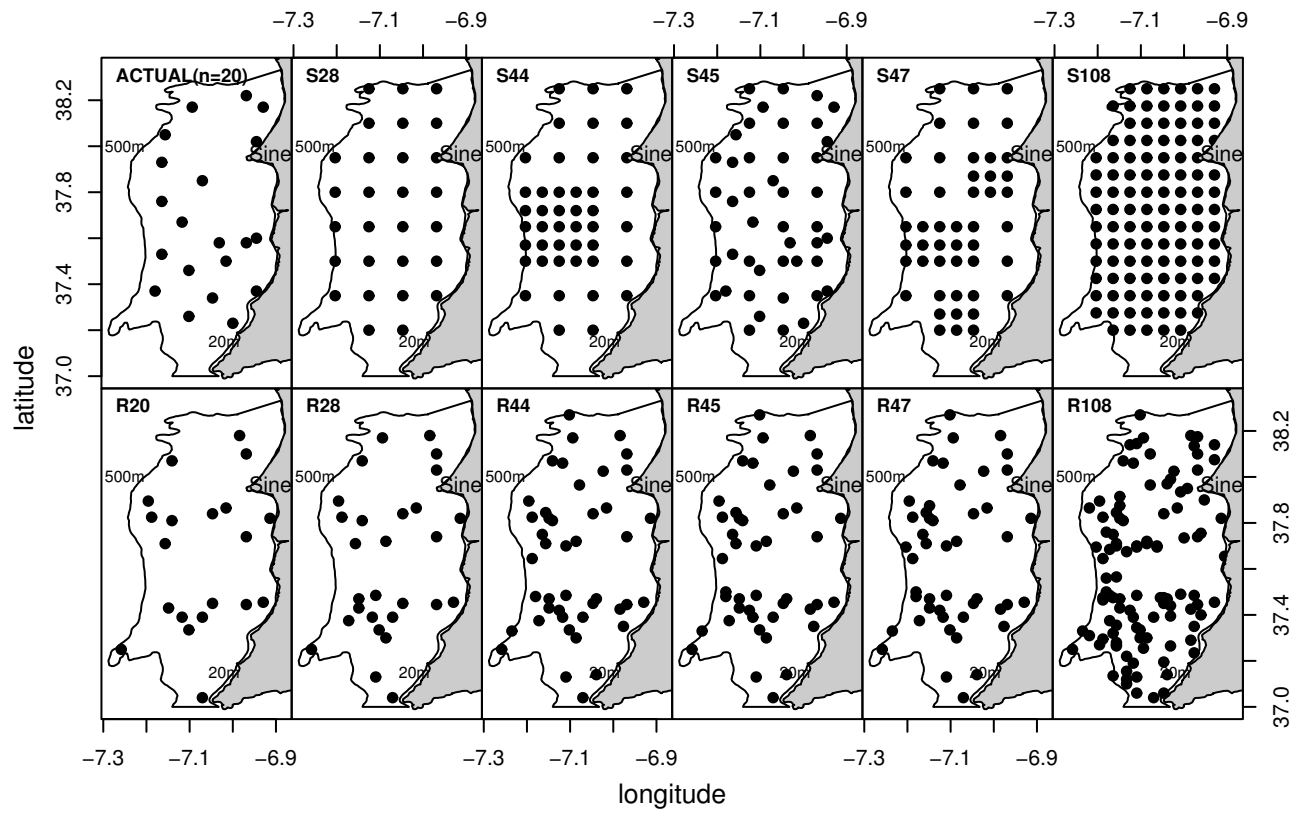


FIGURE 02


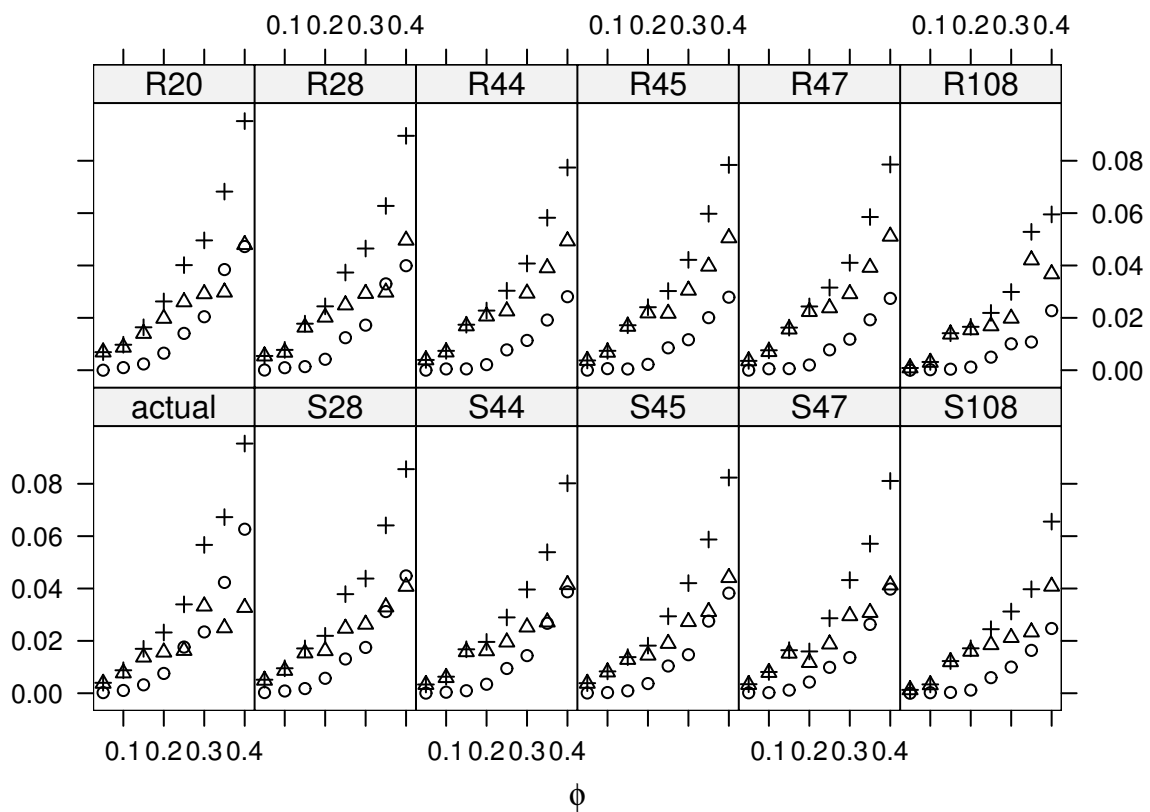


FIGURE 03

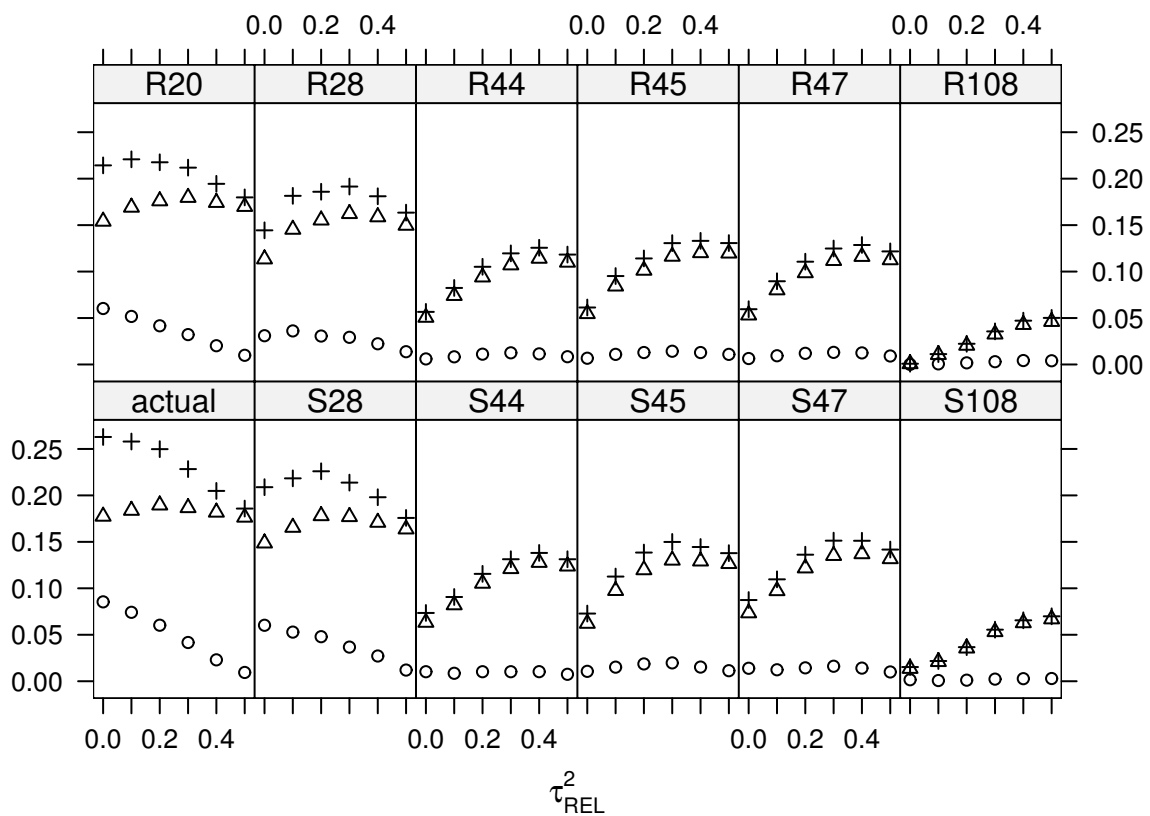